

B95

FLEXIBLE EPOXY SYSTEM


Excellent corrosion-, wear- and impact resistance



Outstanding corrosion protection in heavy industrial or coastal areas

Epoxy coating with the advantages of an elastic paint.

- Virtually solvent-free
- Hard-wearing and impact proof finish
- Outstanding corrosion protection in heavy industrial or coastal areas
- Low odour during application
- Ideal for airless application
- Semi-gloss finish
- 1:1 mixing ratio

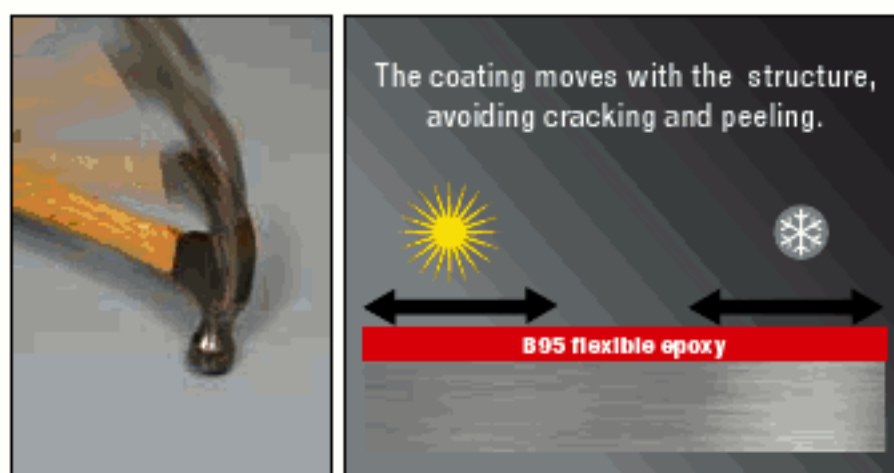


Impact resistant

Flexible

Technical reference

	Solvent-free
Coverage:	6.6 m ² /l. at 150 µm dry
Dry to touch:	8 hrs
Dry to recoat:	12 hrs
Colours:	See colour card
Pack sizes:	10L
Substrates:	Manually prepared, bare-, galvanised- or primed metal, concrete and masonry, primers 5401 and 3333.
Recoatable with:	RUST-O-THANE® 9600

Standard colours:

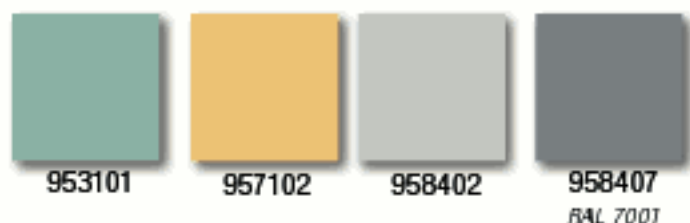

Available in almost any colour upon request (RAL, BS, AFNOR, etc.)
Note: Minor differences between printed and supplied colours are possible.

Outstanding corrosion protection in heavy industrial or coastal areas



GENERAL

METAL
General Purpose

METAL
Noxydizing™

METAL
Cladding Solutions

FLOORS

EXTERIOR WALLS

ROOFS

HYGIENE

TECHNICAL