

# PEGARUST



*Can be applied in virtually any type of weather*



## Rust preventing coating

### PEGARUST

PEGARUST is a primer and topcoat in one and can be applied directly on various metallic substrates. The improved PEGARUST can easily be applied with brush, roller or airless equipment.

PEGARUST guarantees durable protection through the unique elastic and waterproofing binder technology. Characteristic of PEGARUST is the outstanding adhesion: PEGARUST can even be applied on moist surfaces and in damp weather. For this reason PEGARUST is applied on metal roofing and cladding, but for instance also on pipelines with outside condensation.

PEGARUST can be applied on most types of metal including steel, galvanized steel, aluminum, zinc etc. Rust needs to be removed by scraping and wire brushing (St3) or grid blasting (Sa2). PEGARUST can be applied on top of previous, good adhering paint systems.




**PEGARUST** is dry to touch in 3-4 hours (20°C and 60% RH) and can be recoated after 24 hours. PEGARUST can be applied in damp weather at temperatures down to minus 5°C and is rain resistant in two hours.

PEGARUST is available in 70% gloss in the standard colors 10 (English Red), 20 (Green-grey) and 30 (Beige-grey) in 5 and 20 litre cans. Other colors are available on request.

### The advantages of PEGARUST:

- Primer and topcoat in one
- Durable corrosion protection
- Easy to apply with roller, brush, air atomizing spray or airless equipment
- Can be applied in virtually every type of weather, elongated application season.
- Can be applied on moist substrates
- No cracking due to long lasting elasticity.

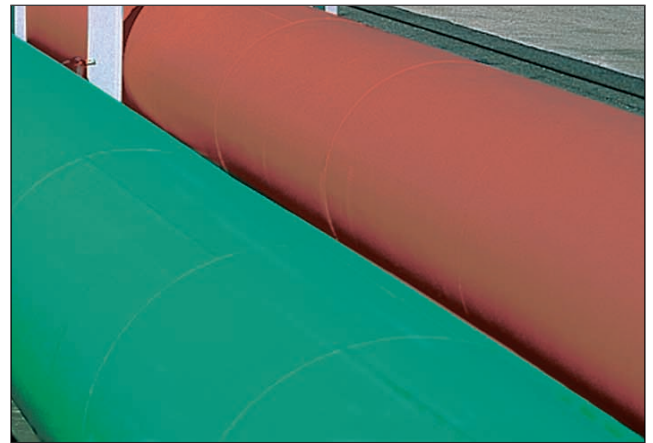

An **RPM** Company

**RUST-OLEUM MATHYS**  
best solutions in paints & coatings

Your distributor:



Promain UK Limited  
1 North End, Bury Mead Rd.  
Hitchin  
Herts  
SG5 1RT

Phone: 01462 621 333  
Email: [info@promain.co.uk](mailto:info@promain.co.uk)  
Web: [www.promain.co.uk](http://www.promain.co.uk)

These guidelines are provided for information purposes only. Since the manufacturer is unable to exercise any control over the correct application and processing of the products, he cannot accept any responsibility for this.

**Rust-Oleum Netherlands B.V.**  
P.O. Box 138  
4700 AC Roosendaal  
The Netherlands  
T: +31 (0) 165 593 636  
F: +31 (0) 165 593 600  
[info.nl@ro-m.com](mailto:info.nl@ro-m.com)  
[www.ro-m.com](http://www.ro-m.com)

**Rust-Oleum UK Ltd.**  
Unit 6, Spitfire Close  
Coventry Business Park  
Coventry, CV5 6UR  
United Kingdom  
T +44 (0)2476 717 329  
F +44 (0)2476 718 930  
[info.uk@ro-m.com](mailto:info.uk@ro-m.com)  
[www.ro-m.com](http://www.ro-m.com)

**Rust-Oleum France S.A.S.**  
11, rue Jules Verne - B.P. 60039  
95322 St-Leu-La-Forêt Cedex  
France  
T: +33 (0) 130 40 00 44  
F: +33 (0) 130 40 99 80  
[info.fr@ro-m.com](mailto:info.fr@ro-m.com)  
[www.ro-m.com](http://www.ro-m.com)

**Rust-Oleum Mathys Italia s.r.l.**  
Largo Donegani 2  
20121 Milan  
Italy  
T: +39 335 10 93 482  
[info.it@ro-m.com](mailto:info.it@ro-m.com)  
[www.ro-m.com](http://www.ro-m.com)

**N.V. Martin Mathys S.A.**  
Kolenbergstraat 23  
3545 Zelem  
Belgium  
T: +32 (0) 13 460 200  
F: +32 (0) 13 460 201  
[info.be@ro-m.com](mailto:info.be@ro-m.com)  
[www.ro-m.com](http://www.ro-m.com)