
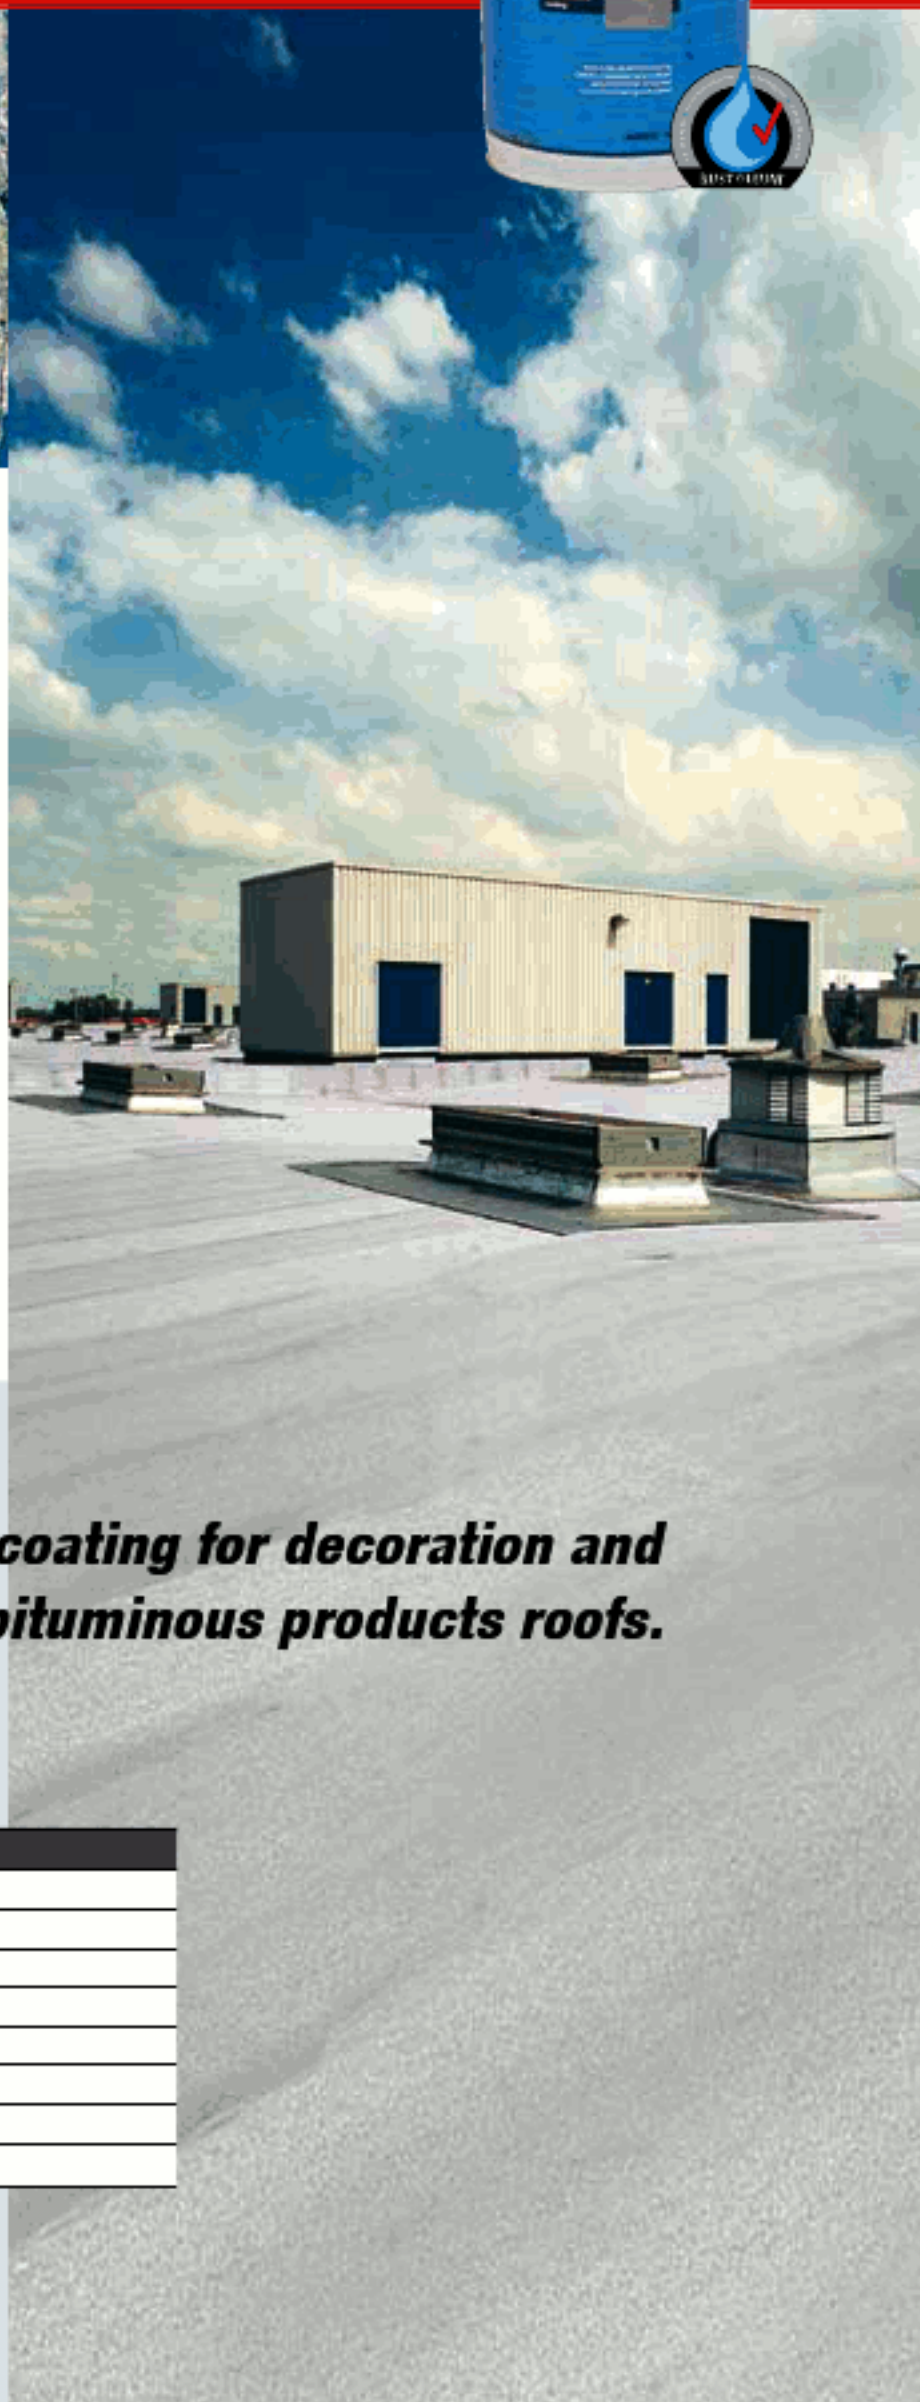


MACROM **DAC HYDRO ALU**

SOLAR REFLECTIVE COATING

Waterbased aluminium roof coating

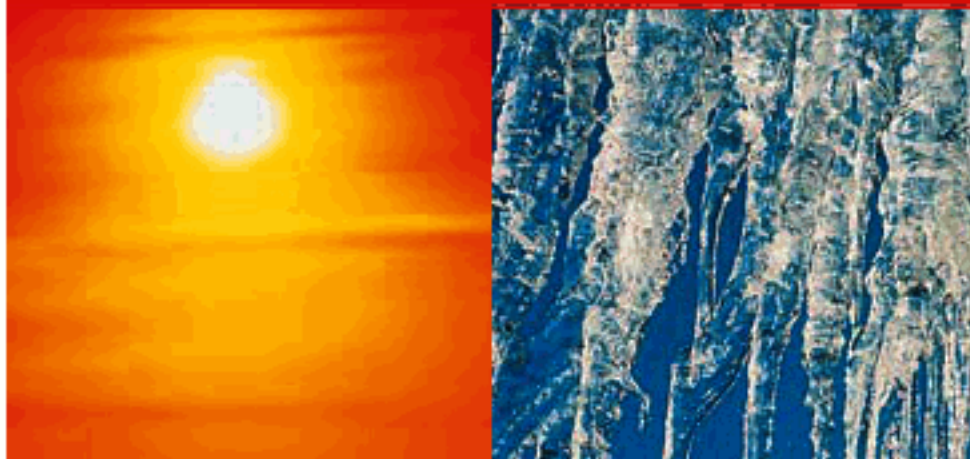

- Heat-reflecting, excellent resistance to water
- Optimal resistance to extreme weather effects and changes in temperature
- Lasting elastic layer without seams or joins
- Lasting finish: aluminium particles bound in paint
- Vapour-permeable
- Can be used as a topcoat on Dacfill
- 400% elastic

Waterborne, ready-to-use aluminium coating for decoration and lasting protection of metal and most bituminous products roofs.

Technical reference	
	Water based
Coverage:	1 - 1.5 m ² /l. (see datasheet)
Dry to touch:	4 hrs
Dry to recoat:	24 hrs
Colours:	Aluminium gloss finish
Pack sizes:	4L, 20L
Substrates:	Roofing, bituminous, metals
Recoatable with:	Not applicable



GENERAL

METAL
General Purpose

METAL
Noxydizing™

METAL
Cladding Solutions

FLOORS

EXTERIOR WALLS

ROOFS

HYGIENE

TECHNICAL