




TIKKURILA

PROFESSIONAL

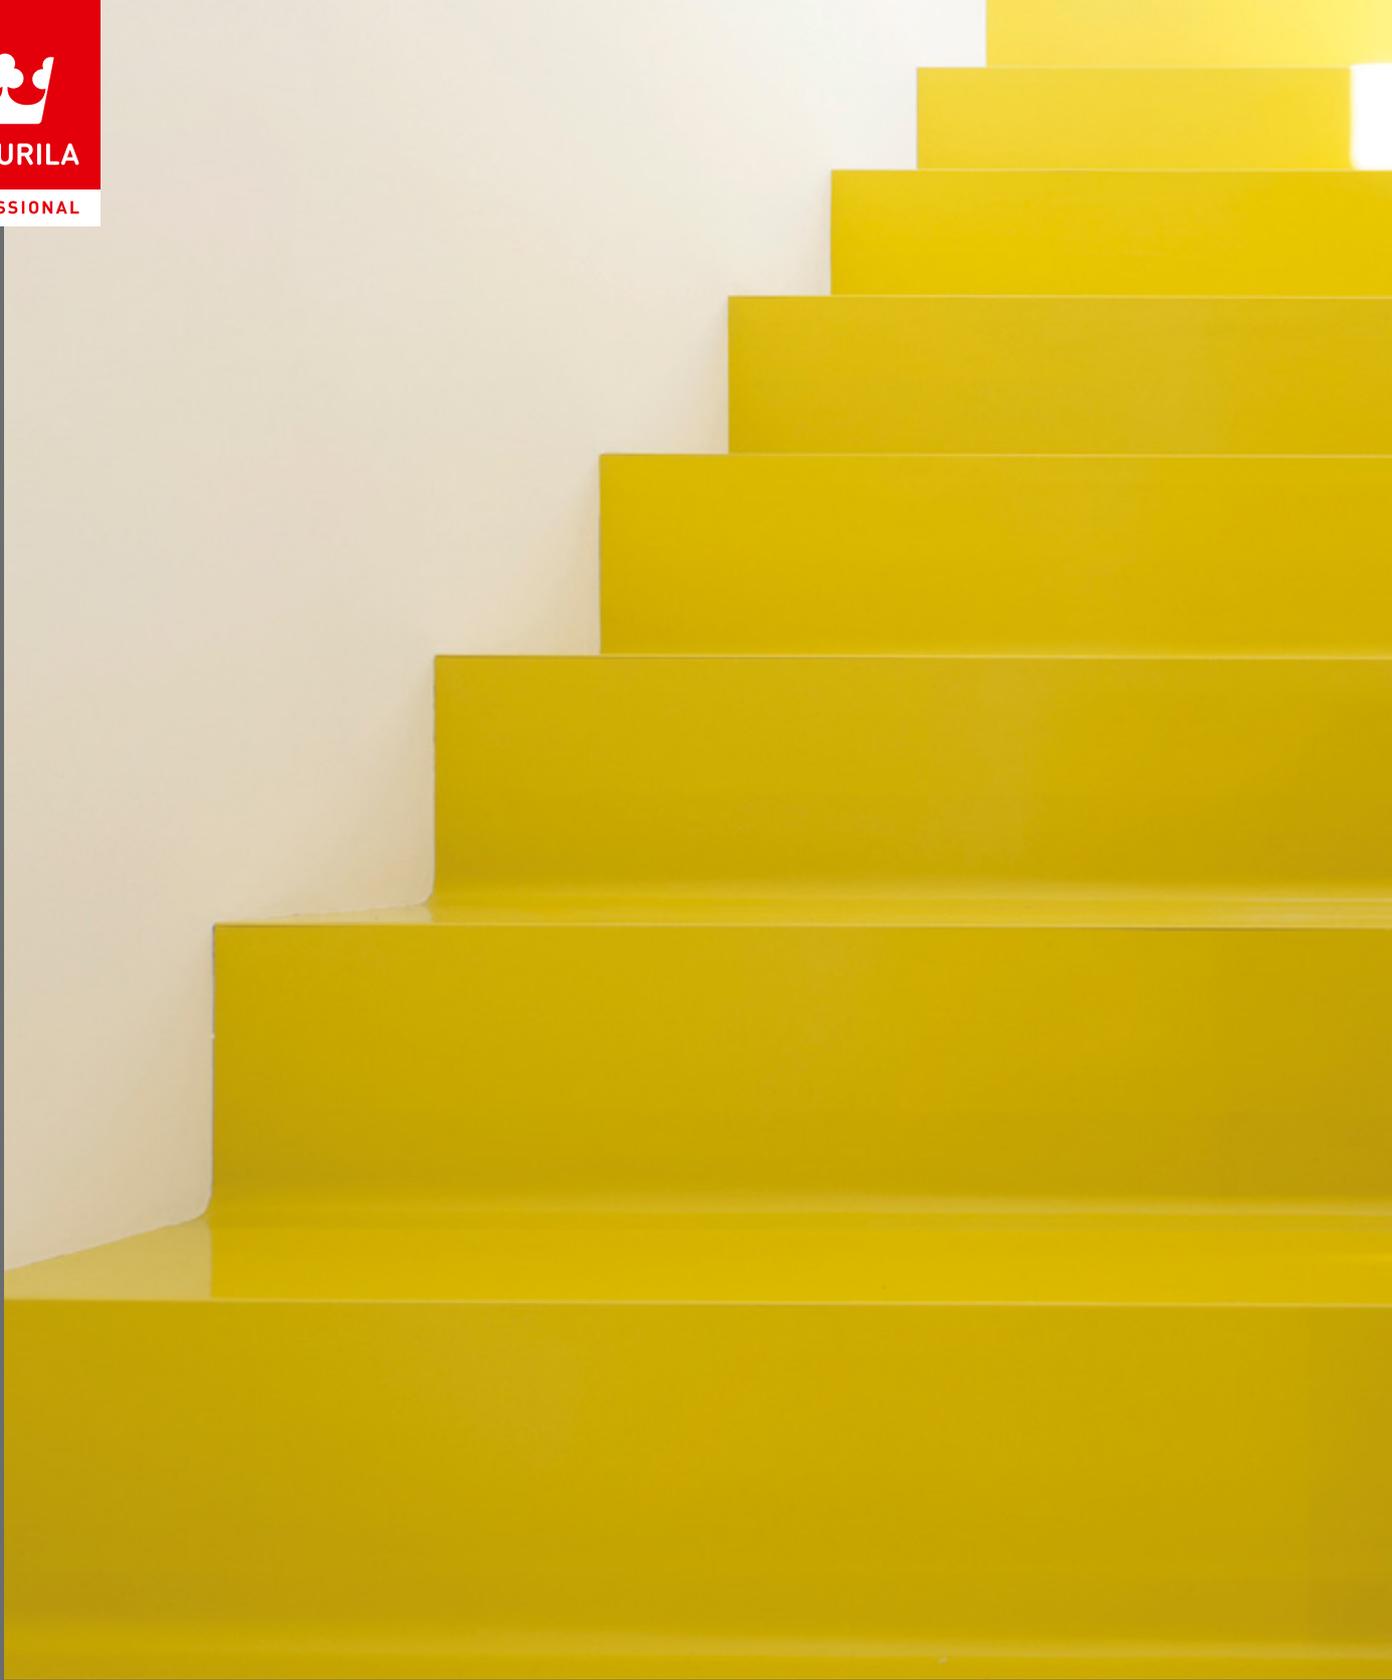

Solid WB-L

QUICK-DRYING FLOOR PAINT FOR
CONCRETE AND WOODEN FLOORS
SUBJECTED TO LIGHT WEAR



Easy-to-use paint for concrete and wooden floors

SOLID WB-L IS A WATER-BORNE, LOW-EMITTING POLYURETHANE-REINFORCED DISPERSIVE FLOOR PAINT.

Multipurpose maintenance paint

Solid WB-L is suitable for surfaces subjected to light mechanical and chemical stress, mainly foot traffic. It can be used to paint both untreated and treated concrete and wooden floors and staircases. Concrete floors should be primed with Solid WB-L Primer.

Solid WB-L is typically used in residential and storage facilities; it is also suitable for concrete floors in saunas and other humid spaces.



BENEFITS:

- ☑ EASY TO USE
- ☑ WON'T YELLOW
- ☑ WIDE COLOR RANGE
- ☑ SURFACE DRY IN APPROX. 15 MIN, SECOND COAT IN APPROXIMATELY ONE HOUR



PACK SIZE	2.7 L, 9 L, and 18 L
COLOR	Most of the Tikkurila Symphony color card
GLOSS VALUE	Semi-gloss
THINNER	Water

For application instructions please refer to the product data sheet.