


**WALTHER
STRONG®**



**IF YOU'RE A PROFESSIONAL
YOU'RE USING WALTHER STRONG**

DeckTape®

50MM-300MM Range



**25 YEAR
GUARANTEE**

**AVAILABLE IN
8 DIFFERENT WIDTHS!**



50MM

65MM

82MM

100MM



150MM



200MM




250MM



300MM

What will your deck frame look like in 5 years ?

Protect your joists with DeckTape®

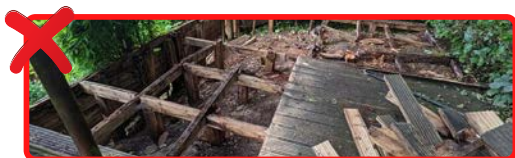

ADVANCED 5-LAYER TECHNOLOGY®



Scan to watch why deck frame
protection is important !




Scan to watch why non-butyl deck
tape is important !

AVAILABLE IN STORE OR ONLINE




Curing Process :

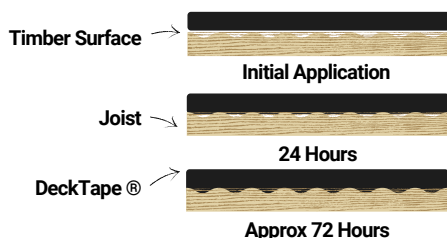

DeckTape® becomes gradually stronger over 24-72 hours as the adhesive soaks into the timber and fully cures.

Coloured water test :

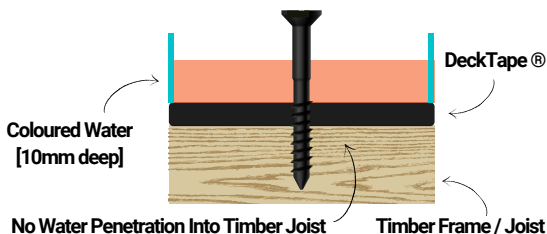

Completely self-sealed when fastener is driven through the DeckTape®

50MM X 20M

[top of single joists]



65MM X 20M

[top of single joists]



82MM X 20M

[noggins]



100MM X 20M

[top of double joists]



150MM X 20M

[top of triple joists]



200MM X 20M

[specialised applications]



250MM X 20M

[specialised applications]



300MM X 20M

[joists below curved decking]



Completely protects and seals your new or existing timber deck frame from water/moisture rot and frame weathering.

- Non-Butyl
- Completely UV Stable
- Easy-to-tear
- Permanent Adhesive Bond For 50 Years
- Self-Seals Around Fasteners
- Can Apply to Damp Timber or Below Freezing