





Ceilcote® 2000 Flakeline

- Flake filled novolac epoxy lining
- Excellent chemical resistance including concentrated H₂SO₄

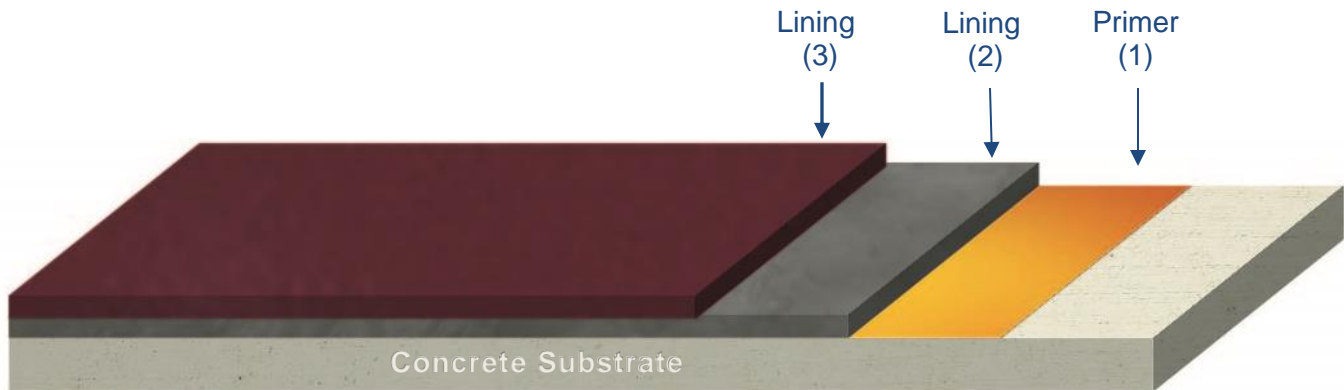

Typical total system thickness: 800µm (32mil)

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Primer	Seal concrete		Ceilcote 680M Resin	5 m ² /litre	200 sq.ft./gal.	
2	Lining	400µm	16mil	Ceilcote 2000 Flakeline	2.1 m ² /litre	85 sq.ft./gal.	
3	Lining	400µm	16mil	Ceilcote 2000 Flakeline	2.1 m ² /litre	85 sq.ft./gal.	

Full System details including Application Guidelines and MSDS for component products can be found at: <https://www.international-pc.com/product/ceilcote-2000-flakeline>

Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

*All thicknesses given are typical and may change dependent on service conditions.

**All coverage rates are practical, for guidance only and may vary due to a number of factors

For some service environments, Ceilcote 2000 Flakeline may be applied at a thickness of 1x500µm (1x16mil)