



ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025 for
Elastocolor Pittura
Elastocolor Pittura Plus
Elastocolor Rasante
Elastocolor Rasante SF
Elastocolor Tonachino Plus
Elastocolor Waterproof



Programme:
**The International
EPD[®] System;**
www.environdedec.com

Programme
operator:
EPD International AB

EPD registration
number:
S-P-01378

Publication
date:
2019-01-18

Valid until:
2024-01-17

Geographical
scope:
International





1. COMPANY DESCRIPTION / GOAL & SCOPE

Founded in 1937 in Milan, Italy, Mapei produces adhesives and complementary products for laying all types of floor, wall and coating materials, and also specializes in other chemical products used in the building industry, such as waterproofing products, specialty mortars, admixtures for concrete, products for underground constructions and for the restoration of concrete and historical buildings.

There are currently 85 subsidiaries in the Mapei Group, with a total of 80 production facilities located around the world in 35 different countries and in 5 different continents. Mapei also has 31 central laboratories. Most locations are ISO 9001 and ISO 14001 or EMAS-certified.

Mapei's strategy of internationalization is based on two main objectives: being closer to local needs and lowering transportation costs. With the declared objective of being close to buyers and clients, Mapei's presence in the five continents enables the company to comply with the requirements of each location, and to use only locally-based managers and qualified personnel, without changing the approach of Mapei.

Mapei invests 12% in its company's total work-force and 5% of its turnover in Research & Development; in particular, 70% of its R&D efforts are directed to develop eco-sustainable and environmentally friendly products, which give important contribution to all major green rating systems for eco-sustainable buildings such as LEED and BREEAM.

Furthermore, Mapei has developed a sales and technical service network with offices all over the world and offers an efficient Technical Assistance Service that is valued by architects, engineers, contractors and owners.

The goal of the study is to provide necessary data and documentation to produce an EPD according to the requirements of PCR Environdec (version 2.2, 2017-05-30) under EN 15804:2014 and to have more comprehension about the environmental impacts related to **Elastocolor Pittura**, **Elastocolor Pittura Plus**, **Elastocolor Rasante**, **Elastocolor Rasante SF**, **Elastocolor Tonachino Plus** and **Elastocolor Waterproof** manufactured in Mapei S.p.A. located in Robbiano di Mediglia (Italy), including packaging of the finished products.

Target audiences of the study are customers and other parties with an interest in the environmental impacts of **Elastocolor Pittura**, **Elastocolor Pittura Plus**, **Elastocolor Rasante**, **Elastocolor Rasante SF**, **Elastocolor Tonachino Plus** and **Elastocolor Waterproof**.

This analysis shall not support comparative assertions intended to be disclosed to the public.

2. PRODUCT DESCRIPTION

Elastocolor Pittura is an elastomeric, crack-bridging, protective paint, with permanent flexibility and high resistance to chemicals for internal and external surfaces.

Elastocolor Pittura Plus is an elastomeric hygienising paint with crack-bridging ability, for interiors and exteriors, with long lasting elasticity and mould and algae resistance.

Elastocolor Waterproof is a waterproof, easy-to-clean acrylic paint for internal and external surfaces in permanent contact with water.

Elastocolor Tonachino Plus is an elastic, water-repellent, algae and mould resistant, hygienising, elastomeric coating for internal and external surfaces. Available in 1.2 mm grain size.

Elastocolor Rasante is a fibre-reinforced, elastomeric, high flexibility finishing product with good defect covering capacity, for internal and external applications.


Elastocolor Rasante SF is a fibre-reinforced, elastomeric, thick-layer finishing product with high filling properties, for internal and external surfaces.

All products meet the requirements of EN 1504-9 ("Products and systems for protecting and repairing concrete structures: definitions, requirements, quality control and conformity assessment. General principles for the use and application of systems"), and the requirements of EN 1504-2 ("Surface protection system for concrete") for the following classes: surface protection products – coating (C) – ingress protection (I.3) (PI) (ZA.1d) + moisture control (2.2) (MC) and increasing resistivity (8.2) (IR) (ZA.1e) + physical resistance (5.1) (resistance in physical, PR) (ZA.1f) (only **Elastocolor Pittura Plus**).

Elastocolor Tonachino Plus complies also with the requirements of EN 15824 ("Specifications for external renders and internal plasters based on organic binders") for internal and external applications.

All products studied are supplied in plastic buckets with 20 kg of product and are delivered on wooden pallets wrapped with LDPE.

For further information see the Technical Data Sheets (TDS).





3. CONTENT DECLARATION

The main components and ancillary materials of the products studied are the following:

Table 1: Composition

Materials	Percentage (%)
Polymer dispersions	< 50
Fillers	< 40
Biocides	< 1
Pigments	< 15
Water	< 20
Other (Additives & Packaging)	< 5

The products contain neither carcinogenic substances nor substances of very high concern (SVHC) on the REACH Candidate List published by the European Chemicals Agency, in a concentration greater than 0,1 % (by unit weight).

4. DECLARED UNIT AND REFERENCE SERVICE LIFE

The declared unit is 1 kg of coating (packaging included).

Packaging materials include:

- Wooden pallet
- Polypropylene bucket
- LDPE for wrapping

According to the system boundary applied the RSL is not specified in this study.

5. SYSTEM BOUNDARIES AND ADDITIONAL TECHNICAL INFORMATION

The approach is “cradle to gate”.

The following modules have been considered:

- A1 – A3 (Product stage): extraction and transport of raw materials, packaging included, production process..

Table 2: System boundaries

System Boundaries														
A1 – A3			A4 – A5		B1 – B7					C1 – C4				D
PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE					END OF LIFE STAGE				
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	C1	C2	C3	C4	
Raw Material Supply	Transport	Manufacturing	Transport	Installation Process	Use	Maintenance	Repair	Replacement	Refurbishment	Deconstruction/ Demolition	Transport	Waste Processing	Disposal	
					B6	Operational Energy Use								
					B7	Operational Water Use								
													Reuse-Recovery-Recycling-potential	

included

excluded

 included  excluded

A brief description of production process, is the following:

The production process starts from raw materials, that are purchased from external and intercompany suppliers and stored in the plant. Bulk raw materials are stored in specific silos and added automatically in the production mixer, according to the formula of the product. Other raw materials, supplied in bags, big bags or tanks, are stored in the warehouse and added automatically or manually in the mixer. The production is a discontinuous process, in which all the components are mechanically mixed in batches. The semi-finished product is then packaged, put on wooden pallets and stored in the finished products warehouse. The quality of final products is controlled before the sale.

*Elastocolor Pittura, Elastocolor Pittura Plus
Elastocolor Rasante, Elastocolor Rasante SF
Elastocolor Tonachino Plus, Elastocolor Waterproof*



Figure 1: Production process detail

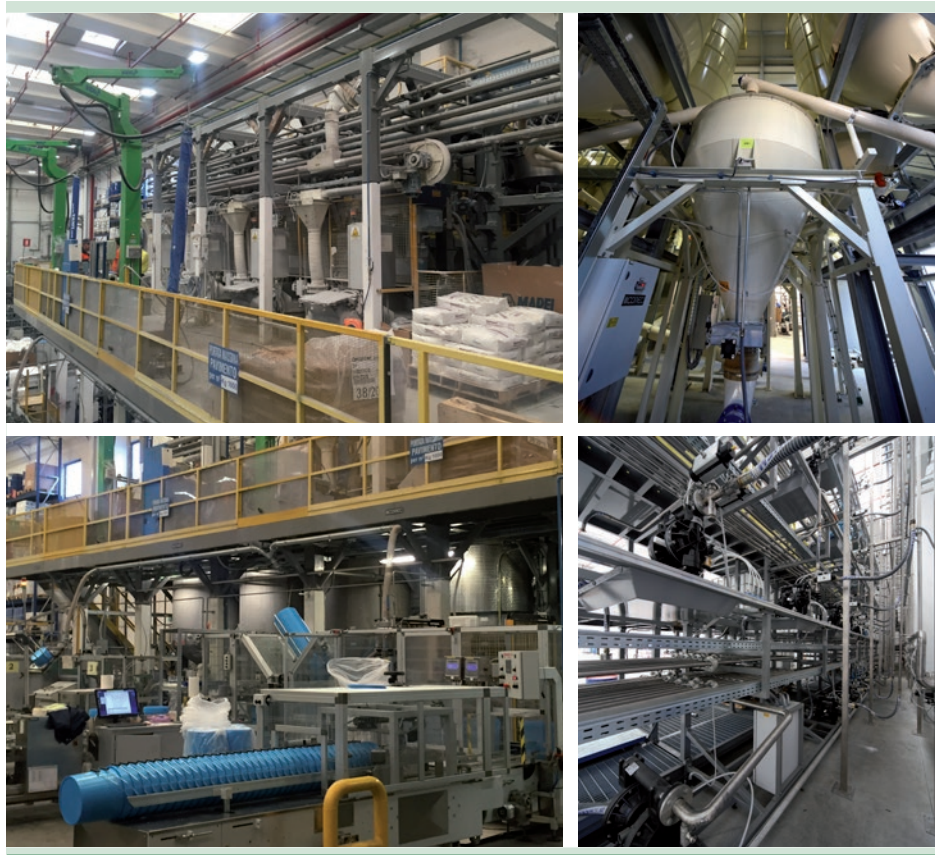


Figure 2: Mediglia Plant



6. CUT-OFF RULES & ALLOCATION

Criteria for the exclusion of inputs and outputs (cut-off rules) in the LCA, information modules and any additional information are intended to support an efficient calculation procedure. They are not applied in order to hide data.

The procedure of exclusion of inputs and outputs is the following:

- All inputs and outputs to a unit process, for which data are available, are included in the calculation
- Cut-off criteria, where applied, are described in Table 3

Input flows are covered for the whole formula.

Table 3: Cut-off criteria

Process excluded from study	Cut-off criteria	Quantified contribution from process
A3: production (auxiliary materials)	Less than 10^{-5} kg/kg of finished product	Sensibility study demonstrates a contribute lower than 0,5%
A3: waste and particle emission	Less than 10^{-5} kg/kg of finished product	Sensibility study demonstrates a contribute lower than 0,5%

For the allocation procedure and principles, consider the Table 4.

Table 4: Allocation procedure and principles

Module	Allocation Principle
A1	All data are referred to 1 kg of product • A1: electricity is allocated to the coating department
A3	All data are referred to 1 kg of packaged product • A3-wastes: all data are allocated to the whole plant production

**Elastocolor Pittura, Elastocolor Pittura Plus
Elastocolor Rasante, Elastocolor Rasante SF
Elastocolor Tonachino Plus, Elastocolor Waterproof**



7. ENVIRONMENTAL PERFORMANCE & INTERPRETATION



GWP₁₀₀

Global Warming Potential refers to the emission/presence of GHGs (greenhouse gases) in the atmosphere (mainly CO₂, N₂O, CH₄) which contribute to the increase in the temperature of the planet.



AP

Acidification Potential refers to the emission of specific acidifying substances (i.e. NO_x, SO_x) in the air. These substances decrease the pH of the rainfall with predictable damages to the ecosystem.



EP

Eutrophication Potential refers to the nutrient enrichment of flowing water, which determines unbalance in aquatic ecosystems and causes the death of the aquatic fauna.



ODP

Ozone Depletion Potential refers to the degradation of the stratospheric layer of the ozone involved in blocking the UV component of sunrays. Depletion is due to particularly reactive components that originate from chlorofluorocarbon (CFC) or chlorofluoromethanes (CFM).



POCP

The Photochemical Ozone Creation Potential is the ozone formation in low atmosphere. This is quite common in the cities where a great amount of pollutants (like VOC and NO_x) are emitted every day (industrial emissions and vehicles). It is mainly diffused during the summertime.



ADP_e (elements)

Abiotic Depletion Potential elements refers to the depletion of the mineral resources.







ADP_f (fossil fuel)

Abiotic Depletion Potential fossil fuel refers to the depletion of the fossil fuel resources.

Following tables show environmental impacts for the products considered according to CML methodology (2001 – Jan. 2016 ver. 4.7). All the results are referred to the declared unit (see § 4).

Elastocolor Pittura

Table 5: **Elastocolor Pittura**: Environmental categories referred to the declared unit

Environmental category	Unit	A1 – A3
 GWP₁₀₀	(kg CO ₂ eq.)	1,23E+00
 ADPe (element)	(kg Sb eq.)	7,12E-03
 ADPf (fossil)	(MJ)	2,80E+01
 AP	(kg SO ₂ eq.)	2,17E-02
 EP	(kg (PO ₄) ³⁻ eq.)	9,24E-04
 ODP	(kg R-11 eq.)	4,61E-07
 POCP	(kg ethylene eq.)	1,04E-03

GWP₁₀₀: Global Warming Potential; **ADPe**: Abiotic Depletion Potential (elements); **EP**: Eutrophication Potential; **AP**: Acidification Potential; **POCP**: Photochemical Ozone Creation Potential; **ODP**: Ozone Depletion Potential; **ADPf**: Abiotic Depletion Potential (fossil)

**Elastocolor Pittura, Elastocolor Pittura Plus
Elastocolor Rasante, Elastocolor Rasante SF
Elastocolor Tonachino Plus, Elastocolor Waterproof**



Table 6: **Elastocolor Pittura**: Other environmental indicators referred to the declared unit

Environmental Indicator	Unit	A1-A3
RPEE	MJ	1,38E+00
RPEM	MJ	-
TPE	MJ	1,38E+00
NRPE	MJ	2,98E+01
NRPM	MJ	-
TRPE	MJ	2,98E+01
SM	kg	-
RSF	MJ	-
NRSF	MJ	-
W	m ³	1,13E-02

RPEE Renewable primary energy as energy carrier; **RPEM** Renewable primary energy as material utilisation; **TPE** Total use of renewable primary energy sources; **NRPE** Non-renewable primary energy as energy carrier; **NRPM** Non-renewable primary energy as material utilization; **TRPE** Total use of non-renewable primary energy sources; **SM** Use of secondary materials; **RSF** Renewable secondary fuels; **NRSF** Non-renewable secondary fuels; **W** Net use of fresh water








Table 7: **Elastocolor Pittura**: Waste production and other output flows referred to the declared unit

Output flow	Unit	A1-A3
NHW	kg	7,54E-03
HW	kg	4,41E-06
RW	kg	0,00E+00
Components for re-use	kg	-
Materials for recycling	kg	-
Materials for energy recovery	kg	-
Exported energy	MJ	-

HW Hazardous waste disposed; **NHW** Non Hazardous waste disposed; **RW** Radioactive waste disposed

Elastocolor Pittura Plus

Table 8: **Elastocolor Pittura Plus**: Environmental categories referred to the declared unit

Environmental category	Unit	A1 – A3
 GWP₁₀₀	(kg CO ₂ eq.)	1,27E+00
 ADPe (element)	(kg Sb eq.)	7,12E-03
 ADPf (fossil)	(MJ)	2,86E+01
 AP	(kg SO ₂ eq.)	2,24E-02
 EP	(kg (PO ₄) ³ -eq.)	9,94E-04
 ODP	(kg R-11 eq.)	1,12E-06
 POCP	(kg ethylene eq.)	1,08E-03

GWP₁₀₀: Global Warming Potential; **ADPe**: Abiotic Depletion Potential (elements); **EP**: Eutrophication Potential; **AP**: Acidification Potential; **POCP**: Photochemical Ozone Creation Potential; **ODP**: Ozone Depletion Potential; **ADPf**: Abiotic Depletion Potential (fossil)

**Elastocolor Pittura, Elastocolor Pittura Plus
Elastocolor Rasante, Elastocolor Rasante SF
Elastocolor Tonachino Plus, Elastocolor Waterproof**



Table 9: **Elastocolor Pittura Plus**: Other environmental indicators referred to the declared unit

Environmental Indicator	Unit	A1-A3
RPEE	MJ	1,42E+00
RPEM	MJ	-
TPE	MJ	1,42E+00
NRPE	MJ	3,04E+01
NRPM	MJ	-
TRPE	MJ	3,04E+01
SM	kg	-
RSF	MJ	-
NRSF	MJ	-
W	m ³	1,17E-02

RPEE Renewable primary energy as energy carrier; **RPEM** Renewable primary energy as material utilisation; **TPE** Total use of renewable primary energy sources; **NRPE** Non-renewable primary energy as energy carrier; **NRPM** Non-renewable primary energy as material utilization; **TRPE** Total use of non-renewable primary energy sources; **SM** Use of secondary materials; **RSF** Renewable secondary fuels; **NRSF** Non-renewable secondary fuels; **W** Net use of fresh water








Table 10: **Elastocolor Pittura Plus**: Waste production & other output flows referred to the declared unit

Output flow	Unit	A1-A3
NHW	kg	7,54E-03
HW	kg	4,41E-06
RW	kg	0,00E+00
Components for re-use	kg	-
Materials for recycling	kg	-
Materials for energy recovery	kg	-
Exported energy	MJ	-

HW Hazardous waste disposed; **NHW** Non Hazardous waste disposed; **RW** Radioactive waste disposed

Elastocolor Rasante

Table 11: **Elastocolor Rasante**: Environmental categories referred to the declared unit

Environmental category		Unit	A1 – A3
	GWP₁₀₀	(kg CO ₂ eq.)	1,23E+00
	ADPe (element)	(kg Sb eq.)	6,50E-03
	ADPf (fossil)	(MJ)	2,44E+01
	AP	(kg SO ₂ eq.)	1,10E-02
	EP	(kg (PO ₄) ³ -eq.)	7,00E-04
	ODP	(kg R-11 eq.)	1,94E-07
	POCP	(kg ethylene eq.)	7,11E-04

GWP₁₀₀: Global Warming Potential; **ADPe**: Abiotic Depletion Potential (elements); **EP**: Eutrophication Potential; **AP**: Acidification Potential; **POCP**: Photochemical Ozone Creation Potential; **ODP**: Ozone Depletion Potential; **ADPf**: Abiotic Depletion Potential (fossil)

**Elastocolor Pittura, Elastocolor Pittura Plus
Elastocolor Rasante, Elastocolor Rasante SF
Elastocolor Tonachino Plus, Elastocolor Waterproof**



Table 12: **Elastocolor Rasante**: Other environmental indicators referred to the declared unit

Environmental Indicator	Unit	A1-A3
RPEE	MJ	1,34E+00
RPEM	MJ	-
TPE	MJ	1,34E+00
NRPE	MJ	2,56E+01
NRPM	MJ	-
TRPE	MJ	2,56E+01
SM	kg	-
RSF	MJ	-
NRSF	MJ	-
W	m ³	9,99E-03

RPEE Renewable primary energy as energy carrier; **RPEM** Renewable primary energy as material utilisation; **TPE** Total use of renewable primary energy sources; **NRPE** Non-renewable primary energy as energy carrier; **NRPM** Non-renewable primary energy as material utilization; **TRPE** Total use of non-renewable primary energy sources; **SM** Use of secondary materials; **RSF** Renewable secondary fuels; **NRSF** Non-renewable secondary fuels; **W** Net use of fresh water








Table 13: **Elastocolor Rasante**: Waste production & other output flows referred to the declared unit

Output flow	Unit	A1-A3
NHW	kg	7,54E-03
HW	kg	4,41E-06
RW	kg	0,00E+00
Components for re-use	kg	-
Materials for recycling	kg	-
Materials for energy recovery	kg	-
Exported energy	MJ	-

HW Hazardous waste disposed; **NHW** Non Hazardous waste disposed; **RW** Radioactive waste disposed

Elastocolor Rasante SF

Table 14: **Elastocolor Rasante**: Environmental categories referred to the declared unit

Environmental category	Unit	A1 – A3
 GWP₁₀₀	(kg CO ₂ eq.)	9,38E-01
 ADPe (element)	(kg Sb eq.)	4,55E-03
 ADPf (fossil)	(MJ)	1,86E+01
 AP	(kg SO ₂ eq.)	8,04E-03
 EP	(kg (PO ₄) ³ eq.)	5,29E-04
 ODP	(kg R-11 eq.)	2,01E-07
 POCP	(kg ethylene eq.)	5,06E-04

GWP₁₀₀: Global Warming Potential; **ADPe**: Abiotic Depletion Potential (elements); **EP**: Eutrophication Potential; **AP**: Acidification Potential; **POCP**: Photochemical Ozone Creation Potential; **ODP**: Ozone Depletion Potential; **ADPf**: Abiotic Depletion Potential (fossil)

**Elastocolor Pittura, Elastocolor Pittura Plus
Elastocolor Rasante, Elastocolor Rasante SF
Elastocolor Tonachino Plus, Elastocolor Waterproof**



Table 15: **Elastocolor Rasante SF**: Other environmental indicators referred to the declared unit

Environmental Indicator	Unit	A1-A3
RPEE	MJ	1,10E+00
RPEM	MJ	-
TPE	MJ	1,10E+00
NRPE	MJ	1,96E+01
NRPM	MJ	-
TRPE	MJ	1,96E+01
SM	kg	-
RSF	MJ	-
NRSF	MJ	-
W	m ³	8,00E-03

RPEE Renewable primary energy as energy carrier; **RPEM** Renewable primary energy as material utilisation; **TPE** Total use of renewable primary energy sources; **NRPE** Non-renewable primary energy as energy carrier; **NRPM** Non-renewable primary energy as material utilization; **TRPE** Total use of non-renewable primary energy sources; **SM** Use of secondary materials; **RSF** Renewable secondary fuels; **NRSF** Non-renewable secondary fuels; **W** Net use of fresh water








Table 16: **Elastocolor Rasante SF**: Waste production & other output flows referred to the declared unit

Output flow	Unit	A1-A3
NHW	kg	7,54E-03
HW	kg	4,41E-06
RW	kg	0,00E+00
Components for re-use	kg	-
Materials for recycling	kg	-
Materials for energy recovery	kg	-
Exported energy	MJ	-

HW Hazardous waste disposed; **NHW** Non Hazardous waste disposed; **RW** Radioactive waste disposed

Elastocolor Tonachino Plus

Table 17: **Elastocolor Tonachino Plus**: Environmental categories referred to the declared unit

Environmental category	Unit	A1 – A3
 GWP₁₀₀	(kg CO ₂ eq.)	7,24E-01
 ADPe (element)	(kg Sb eq.)	2,82E-03
 ADPf (fossil)	(MJ)	1,49E+01
 AP	(kg SO ₂ eq.)	6,69E-03
 EP	(kg (PO ₄) ³ -eq.)	5,32E-04
 ODP	(kg R-11 eq.)	7,61E-07
 POCP	(kg ethylene eq.)	4,14E-04

GWP₁₀₀: Global Warming Potential; **ADPe**: Abiotic Depletion Potential (elements); **EP**: Eutrophication Potential; **AP**: Acidification Potential; **POCP**: Photochemical Ozone Creation Potential; **ODP**: Ozone Depletion Potential; **ADPf**: Abiotic Depletion Potential (fossil)

**Elastocolor Pittura, Elastocolor Pittura Plus
Elastocolor Rasante, Elastocolor Rasante SF
Elastocolor Tonachino Plus, Elastocolor Waterproof**



Table 18: **Elastocolor Tonachino Plus**: Other environmental indicators referred to the declared unit

Environmental Indicator	Unit	A1-A3
RPEE	MJ	9,50E-01
RPEM	MJ	-
TPE	MJ	9,50E-01
NRPE	MJ	1,57E+01
NRPM	MJ	-
TRPE	MJ	1,57E+01
SM	kg	-
RSF	MJ	-
NRSF	MJ	-
W	m ³	6,00E-03

RPEE Renewable primary energy as energy carrier; **RPEM** Renewable primary energy as material utilisation; **TPE** Total use of renewable primary energy sources; **NRPE** Non-renewable primary energy as energy carrier; **NRPM** Non-renewable primary energy as material utilization; **TRPE** Total use of non-renewable primary energy sources; **SM** Use of secondary materials; **RSF** Renewable secondary fuels; **NRSF** Non-renewable secondary fuels; **W** Net use of fresh water








Table 19: **Elastocolor Tonachino Plus**: Waste production & other output flows referred to the declared unit

Output flow	Unit	A1-A3
NHW	kg	7,54E-03
HW	kg	4,41E-06
RW	kg	0,00E+00
Components for re-use	kg	-
Materials for recycling	kg	-
Materials for energy recovery	kg	-
Exported energy	MJ	-

HW Hazardous waste disposed; **NHW** Non Hazardous waste disposed; **RW** Radioactive waste disposed

Elastocolor Waterproof

Table 20: **Elastocolor Waterproof**: Environmental categories referred to the declared unit

Environmental category		Unit	A1 – A3
	GWP₁₀₀	(kg CO ₂ eq.)	1,73E+00
	ADPe (element)	(kg Sb eq.)	9,50E-03
	ADPf (fossil)	(MJ)	3,83E+01
	AP	(kg SO ₂ eq.)	2,63E-02
	EP	(kg (PO ₄) ³ eq.)	9,02E-04
	ODP	(kg R-11 eq.)	1,25E-06
	POCP	(kg ethylene eq.)	1,36E-03

GWP₁₀₀: Global Warming Potential; **ADPe**: Abiotic Depletion Potential (elements); **EP**: Eutrophication Potential; **AP**: Acidification Potential; **POCP**: Photochemical Ozone Creation Potential; **ODP**: Ozone Depletion Potential; **ADPf**: Abiotic Depletion Potential (fossil)

**Elastocolor Pittura, Elastocolor Pittura Plus
Elastocolor Rasante, Elastocolor Rasante SF
Elastocolor Tonachino Plus, Elastocolor Waterproof**



Table 21: **Elastocolor Waterproof**: Other environmental indicators referred to the declared unit

Environmental Indicator	Unit	A1-A3
RPEE	MJ	1,68E+00
RPEM	MJ	-
TPE	MJ	1,68E+00
NRPE	MJ	3,99E+01
NRPM	MJ	-
TRPE	MJ	3,99E+01
SM	kg	-
RSF	MJ	-
NRSF	MJ	-
W	m ³	8,67E-03

RPEE Renewable primary energy as energy carrier; **RPEM** Renewable primary energy as material utilisation; **TPE** Total use of renewable primary energy sources; **NRPE** Non-renewable primary energy as energy carrier; **NRPM** Non-renewable primary energy as material utilization; **TRPE** Total use of non-renewable primary energy sources; **SM** Use of secondary materials; **RSF** Renewable secondary fuels; **NRSF** Non-renewable secondary fuels; **W** Net use of fresh water

Table 22: **Elastocolor Waterproof**: Waste production & other output flows referred to the declared unit

Output flow	Unit	A1-A3
NHW	kg	7,54E-03
HW	kg	4,41E-06
RW	kg	0,00E+00
Components for re-use	kg	-
Materials for recycling	kg	-
Materials for energy recovery	kg	-
Exported energy	MJ	-

HW Hazardous waste disposed; **NHW** Non Hazardous waste disposed; **RW** Radioactive waste disposed

Tables above (from 5 to 22) and following graphs (from Table 23 to Table 29) show absolute results and relative contribution for the environmental categories considered in this EPD.


The **module A1** (raw materials extraction and processing) has the greatest contribution for all the environmental categories included in this study. Considering ODP and ADPe, **module A1** highlights a relative contribution close to 100% for all products.

A GWP₁₀₀ detail (Table 29) shows that polymer dispersions, pigments and additives give a significant contribution; also biocides have a remarkable importance even though they are contained in the products with a relative weight lower than 1%.

The electricity consumption used for the manufacturing process doesn't significantly affect the results.

The **module A2** (raw materials transportation) gives a negative contribution to POCP due to the NO and NO₂ emission factors (for more details, see the methodology used: HBEFA -Handbook Emission Factors for Road Transport).

Table 23: Environmental Impact as percentage - **Elastocolor Pittura**

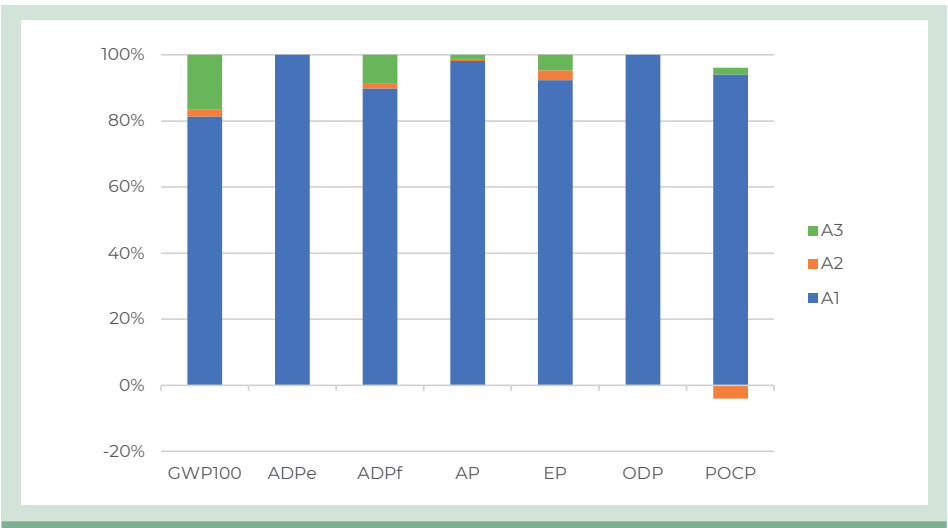

**Elastocolor Pittura, Elastocolor Pittura Plus
Elastocolor Rasante, Elastocolor Rasante SF
Elastocolor Tonachino Plus, Elastocolor Waterproof**



Table 24: Environmental Impact as percentage of **Elastocolor Pittura Plus**



Table 25: Environmental Impact as percentage of **Elastocolor Rasante**

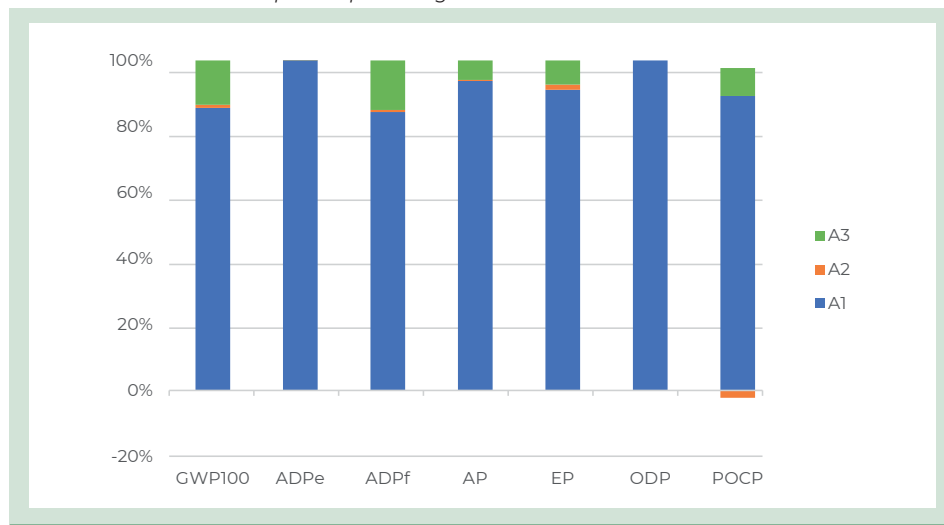


Table 26: Environmental Impact as percentage of **Elastocolor Rasante SF**



Table 27: Environmental Impact as percentage of **Elastocolor Tonachino Plus**



**Elastocolor Pittura, Elastocolor Pittura Plus
Elastocolor Rasante, Elastocolor Rasante SF
Elastocolor Tonachino Plus, Elastocolor Waterproof**



Table 28: Environmental Impact as percentage of **Elastocolor Waterproof**


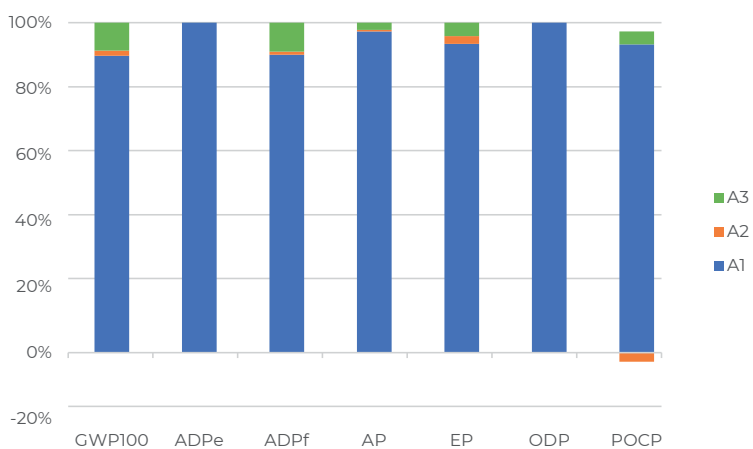


Table 29: Focus on GWP_{100} of the module A1 for all the products

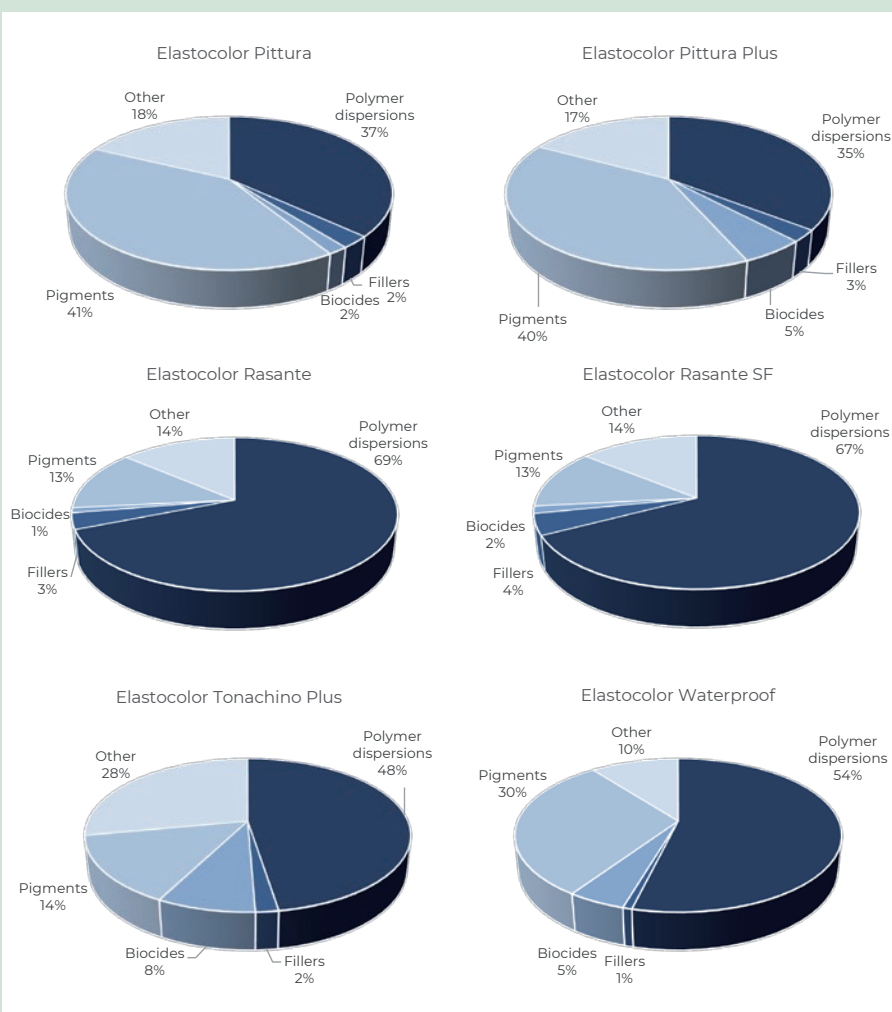

More details about electrical mix used in this EPD (Italian grid mix – 2014), is shown below:

	Data source	Amount	Unit
Electricity grid mix (IT) – 2014	GaBi database	0,4020	kg CO ₂ -eqv/kWh
Electricity from photovoltaic (IT) – 2014	GaBi database	0,0641	kg CO ₂ -eqv/kWh

8. DATA QUALITY

Table 30: Data quality

Dataset & Geographical reference	Database (source)	Temporary reference
A1; A3		
Fillers (EU)	GaBi Database	2017
Additives (EU)	GaBi Database; ecoinvent 3.3	2013 – 2017
Polymer Dispersions (EU)	EcoProfile EPDLA	2015
Electricity grid mix (IT)	GaBi Database	2014
Electricity from photovoltaic (IT)	GaBi Database	2014
Packaging components (EU)	GaBi Database, Plastic Europe	2005 – 2017
A2		
Truck transport (euro 3, 27t payload – GLO)	GaBi Database	2017
Diesel for transport (EU)	GaBi Database	2014

All data included in table above refer to a period between 2005 and 2017; the most relevant ones are specific from supplier, while the others (i.e. transport and minor contribution dataset), come from European and global databases.

All dataset are not more than 10 years old according to EN 15804 § 6.3.7 “Data quality requirements”. The only exception is represented by one raw material used for one packaging component production, coming from PlasticEurope database.

Primary data concern the year 2017 and represent the whole annual production.

**Elastocolor Pittura, Elastocolor Pittura Plus
Elastocolor Rasante, Elastocolor Rasante SF
Elastocolor Tonachino Plus, Elastocolor Waterproof**



9. VERIFICATION AND REGISTRATION

EPD of construction products may not be comparable if they do not comply with EN 15804

Environmental product declarations within the same product category from different programs may not be comparable.

CEN standard EN15804 served as the core PCR

PCR:	PCR 2012:01 Construction products and Construction services, Version 2.2, 2017-05-30
PCR review was conducted by:	The Technical Committee of the International EPD® System. Chair: Massimo Marino Contact via info@environdec.com
Independent verification of the declaration and data, according to ISO 14025	<input checked="" type="checkbox"/> EPD Process Certification (Internal) <input type="checkbox"/> EPD Verification (external)
Third party verifier:	Certiquality S.r.l. Number of accreditation: 003H rev14
Accredited or approved by:	Accredia
Procedure for follow-up of data during EPD validity involves third-party verifier	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

10. REFERENCES

- EN 1504-2 "SURFACE PROTECTION SYSTEM FOR CONCRETE"
- EN 1504-9 "PRODUCTS AND SYSTEMS FOR PROTECTING AND REPAIRING CONCRETE STRUCTURES: DEFINITIONS, REQUIREMENTS, QUALITY CONTROL AND CONFORMITY ASSESSMENT. GENERAL PRINCIPLES FOR THE USE AND APPLICATION OF SYSTEMS"
- EN 15804: SUSTAINABILITY OF CONSTRUCTION WORKS - ENVIRONMENTAL PRODUCT DECLARATIONS - CORE RULES FOR THE PRODUCT CATEGORY OF CONSTRUCTION PRODUCTS
- EN 15824: SPECIFICATIONS FOR EXTERNAL RENDERS AND INTERNAL PLASTERS BASED ON ORGANIC BINDERS
- GENERAL PROGRAMME INSTRUCTIONS OF THE INTERNATIONAL EPD® SYSTEM. VERSION 3.0
- HBEFA - HANDBOOK EMISSION FACTORS FOR ROAD TRANSPORT
- ISO 14025 ENVIRONMENTAL LABELS AND DECLARATIONS - TYPE III ENVIRONMENTAL DECLARATIONS - PRINCIPLES AND PROCEDURES

- ISO 14044 ENVIRONMENTAL MANAGEMENT – LIFE CYCLE ASSESSMENT – REQUIREMENTS AND GUIDELINES
- PCR 2012:01; “PRODUCT GROUP CLASSIFICATION: MULTIPLE UN CPC CODES CONSTRUCTION PRODUCTS AND CONSTRUCTION SERVICES”; VERSION 2.2

CONTACT INFORMATION

EPD owner:	 <small>ADHESIVES • SEALANTS • CHEMICAL PRODUCTS FOR BUILDING</small> Mapei SpA www.mapei.it
LCA Author:	 <small>ADHESIVES • SEALANTS • CHEMICAL PRODUCTS FOR BUILDING</small> Mapei SpA www.mapei.it ; Environmental Sustainability Office
Programme operator:	 EPD International AB info@enviromdec.com

*Elastocolor Pittura, Elastocolor Pittura Plus
Elastocolor Rasante, Elastocolor Rasante SF
Elastocolor Tonachino Plus, Elastocolor Waterproof*

SEDE

MAPEI SpA

Via Cafiero, 22 - 20158 Milano

Tel. +39-02-37673.1

Fax +39-02-37673.214

Internet: www.mapei.com

E-mail: mapei@mapei.it



/mapeispa

