




Heavy Duty Anti-Slip Coating System

FeRFA Type 3 System
DFT = 600µ

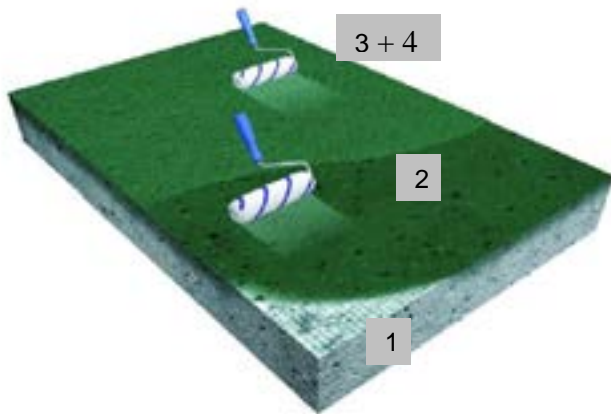

1. Surface preparation by suitable mechanical means.
2. The prepared substrate is primed with Epoxy BS2000 by roller.
3. Application of intermediate coat of Epoxyflex Coating PH with ADD250.
4. Application of top coat of Epoxyflex Coating PH with ADD 250.

System Properties:

<input type="checkbox"/> Solvent Free	<input type="checkbox"/> Excellent scratch resistance
<input type="checkbox"/> Hard wearing	<input type="checkbox"/> Economic
<input type="checkbox"/> Wide colour range	<input type="checkbox"/> Easy to clean
<input type="checkbox"/> Slip resistant	<input type="checkbox"/> No aggregate required
<input type="checkbox"/> High film thickness	<input type="checkbox"/> Silk gloss

Typical Environment

	Light Loads	✓
	Moderate Loads	✓
	Increased Loads	✗
	Heavy Loads	✗

Suitable for Surfaces

Clean concrete without surface sealer	
Prepared concrete and screeds	
Well adhered existing coating, subject to trial	
Surfaces prepared by hand grinding	
Concrete or cement based screeds	





Heavy Duty Anti-Slip Coating System

FeRFA Type 3 System
DFT = 600 μ

Item	Operation	Material / m ²
1	Surface Preparation The substrate shall be prepared by suitable means to remove all contaminants and weakness to give a clean, sound load-bearing surface. If over coating an existing finish a trial shall be conducted to assess bond.	
2	Priming The substrate is primed using Epoxy BS2000.	0.2 kg/m ²
3	Intermediate Coat The primed surface is coated with Epoxyflex Coating PH blended with 2.5% ADD 250 to give an evenly distributed anti-slip profile.	0.3 kg/m ²
4	Top Coat The intermediate coat is sealed with a further coat of Epoxyflex Coating PH blended with 2.5% ADD 250. ADD250 is a special blend of polymer beads which disperse evenly into resin coatings.	0.3 kg/m ²

Notes: Application rates and coverage are theoretical and do not allow for surface profile variation, wastage or variation in application technique. In the case of high substrate roughness you should allow for additional levelling material to be used.