


TradeTip 2

First class surfaces with the right nozzle and gun filter!

NOZZLE MARKING

The nozzle marking gives details of the spraying angle and the bore diameter (determines the volume of flow).
Example: nozzle 517 angle 50° 0 bore 0.017 inches.

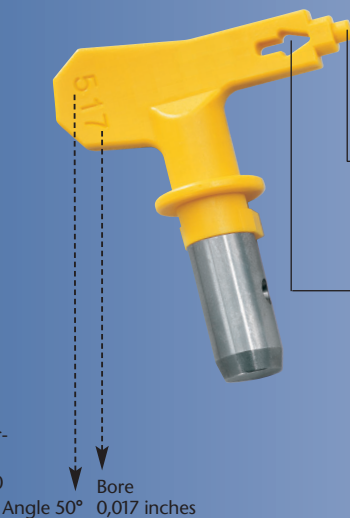


Integral tool for easy insertion and changing of the double seal.

Clear indication of the spraying direction or cleaning position.



SPRAY JET WIDTH


- The ideal distance from the object is always around 30 cm.
- The nozzle angle determines the spray width, e.g. 225 mm with the 517 nozzle.



GUN FILTERS

For every nozzle there is the right filter. Only with this will it be possible to achieve an optimal result. Nozzle blockages will be avoided.

- Filter 180 mesh extra fine
- Filter 100 mesh fine
- Filter 50 mesh medium
- Filter 30 mesh coarse



APPLICATION		NOZZLE MARKING	BORE INCHES (MM)	SPRAY-ING ANGLE	SPRAY JET WIDTH¹	Order Ref. number	PISTOLEN-FILTER
Water diluted and solvent based lacquers and paints, oils, release agents.	7	107	0,007 (0,18)	10 °	100	0552 107	■
		207	0,007 (0,18)	20 °	120	0552 207	■
		307	0,007 (0,18)	30 °	150	0552 307	■
	9	407	0,007 (0,18)	40 °	190	0552 407	■
		109	0,009 (0,23)	10 °	100	0552 109	■
		209	0,009 (0,23)	20 °	120	0552 209	■
		309	0,009 (0,23)	30 °	150	0552 309	■
		409	0,009 (0,23)	40 °	190	0552 409	■
		509	0,009 (0,23)	50 °	225	0552 509	■
Synthetic resin lacquers, PVC lacquers	11	609	0,009 (0,23)	60 °	270	0552 609	■
		111	0,011 (0,28)	10 °	100	0552 111	■
		211	0,011 (0,28)	20 °	120	0552 211	■
		311	0,011 (0,28)	30 °	150	0552 311	■
		411	0,011 (0,28)	40 °	190	0552 411	■
Lacquers, priming varnishes, base coats, fillers	13	511	0,011 (0,28)	50 °	225	0552 511	■
		611	0,011 (0,28)	60 °	270	0552 611	■
		113	0,013 (0,33)	10 °	100	0552 113	■ ■
		213	0,013 (0,33)	20 °	120	0552 213	■ ■
		313	0,013 (0,33)	30 °	150	0552 313	■ ■
		413	0,013 (0,33)	40 °	190	0552 413	■ ■
Fillers, anti-corrosion paints	15	513	0,013 (0,33)	50 °	225	0552 513	■ ■
		613	0,013 (0,33)	60 °	270	0552 613	■ ■
		813	0,013 (0,33)	80 °	330	0552 813	■ ■
		115	0,015 (0,38)	10 °	100	0552 115	■ ■
		215	0,015 (0,38)	20 °	120	0552 215	■ ■
		315	0,015 (0,38)	30 °	150	0552 315	■ ■
		415	0,015 (0,38)	40 °	190	0552 415	■ ■
Anticorrosion paint, latex paints, emulsions	17	515	0,015 (0,38)	50 °	225	0552 515	■ ■
		615	0,015 (0,38)	60 °	270	0552 615	■ ■
		715	0,015 (0,38)	70 °	300	0552 715	■ ■
		815	0,015 (0,38)	80 °	330	0552 815	■ ■
		117	0,017 (0,43)	10 °	100	0552 117	■ ■
		217	0,017 (0,43)	20 °	120	0552 217	■ ■
		317	0,017 (0,43)	30 °	150	0552 317	■ ■
	19	417	0,017 (0,43)	40 °	190	0552 417	■ ■
		517	0,017 (0,43)	50 °	225	0552 517	■ ■
		617	0,017 (0,43)	60 °	270	0552 617	■ ■
		717	0,017 (0,43)	70 °	300	0552 717	■ ■
		817	0,017 (0,43)	80 °	330	0552 817	■ ■
		219	0,019 (0,48)	20 °	120	0552 219	□
		319	0,019 (0,48)	30 °	150	0552 319	□
		419	0,019 (0,48)	40 °	190	0552 419	□
Flame proofing	21	519	0,019 (0,48)	50 °	225	0552 519	□
		619	0,019 (0,48)	60 °	270	0552 619	□
		719	0,019 (0,48)	70 °	300	0552 719	□
		819	0,019 (0,48)	80 °	330	0552 819	□
		919	0,019 (0,48)	90 °	385	0552 919	□
		221	0,021 (0,53)	20 °	120	0552 221	□
		321	0,021 (0,53)	30 °	150	0552 321	□
Roof coatings	23	421	0,021 (0,53)	40 °	190	0552 421	□
		521	0,021 (0,53)	50 °	225	0552 521	□
		621	0,021 (0,53)	60 °	270	0552 621	□
		721	0,021 (0,53)	70 °	300	0552 721	□
		821	0,021 (0,53)	80 °	330	0552 821	□
		921	0,021 (0,53)	90 °	385	0552 921	□
		223	0,023 (0,58)	20 °	120	0552 223	□
Thick film materials, corrosion proofing, spray plasters	25	323	0,023 (0,58)	30 °	150	0552 323	□
		423	0,023 (0,58)	40 °	190	0552 423	□
		523	0,023 (0,58)	50 °	225	0552 523	□
		623	0,023 (0,58)	60 °	270	0552 623	□
		723	0,023 (0,58)	70 °	300	0552 723	□
		823	0,023 (0,58)	80 °	330	0552 823	□
	27	225	0,025 (0,64)	20 °	120	0552 225	□
		325	0,025 (0,64)	30 °	150	0552 325	□
		425	0,025 (0,64)	40 °	190	0552 425	□
		525	0,025 (0,64)	50 °	225	0552 525	□
		625	0,025 (0,64)	60 °	270	0552 625	□
		725	0,025 (0,64)	70 °	300	0552 725	□
	29	825	0,025 (0,64)	80 °	330	0552 825	□
		227	0,027 (0,69)	20 °	150	0552 227	■
		327	0,027 (0,69)	30 °	190	0552 327	■
		427	0,027 (0,69)	40 °	190	0552 427	■
		527	0,027 (0,69)	50 °	225	0552 527	■
		627	0,027 (0,69)	60 °	270	0552 627	■
	31	827	0,027 (0,69)	80 °	330	0552 827	■
		231	0,031 (0,79)	20 °	120	0552 231	■
		331	0,031 (0,79)	30 °	150	0552 331	■
		431	0,031 (0,79)	40 °	190	0552 431	■
		531	0,031 (0,79)	50 °	225	0552 531	■
		631	0,031 (0,79)	60 °	270	0552 631	■
	33	731	0,031 (0,79)	70 °	300	0552 731	■
		831	0,031 (0,79)	80 °	330	0552 831	■
		433	0,033 (0,84)	40 °	190	0552 433	■
		533	0,033 (0,84)	50 °	225	0552 533	■
		633	0,033 (0,84)	60 °	270	0552 633	■
		235	0,035 (0,90)	20 °	120	0552 235	■
	35	335	0,035 (0,90)	30 °	150	0552 335	■
		435	0,035 (0,90)	40 °	190	0552 435	■
		535	0,035 (0,90)	50 °	225	0552 535	■
		635	0,035 (0,90)	60 °	270	0552 635	■
		735	0,035 (0,90)	70 °	300	0552 735	■
		835	0,035 (0,90)	80 °	330	0552 835	■
	39	539	0,039 (0,99)	50 °	225	0552 539	■
Heavy-Duty-applications	43	243	0,043 (1,10)	20 °	120	0552 243	■
		443	0,043 (1,10)	40 °	190	0552 443	■
		543	0,043 (1,10)	50 °	225	0552 543	■
	52	252	0,052 (1,30)	20 °	120	0552 252	■
		552	0,052 (1,30)	50 °	225	0552 552	■
		261	0,061 (1,55)	20 °	120	0552 261	■
	61	461	0,061 (1,55)	40 °	190	0552 461	■
		263	0,063 (1,60)	20 °	120	0552 263	■
		463	0,063 (1,60)	40 °	190	0552 463	■
	63	267	0,067 (1,70)	20 °	120	0552 267	■
		467	0,067 (1,70)	40 °	190	0552 467	■
	67						■

¹ Strahlbreite (mm) bei ca. 30 cm Abstand zum Objekt und 100 bar Druck, mit Kunstharzlack 20 DIN-Sekunden

!

Application-Tips

„Spraying“

Large area spraying of penetrating stopper and wallpaper strippers with the 629 nozzle - best at a working pressure between 10 and 25 bar and a 15 cm nozzle extension.

„Edge cut-off“

Easy cut-off with the 111 nozzle by use of a yellow gun filter and a 15 cm nozzle extension.

TradeTip 2 - Accessories

1

2

3

Nozzle extensions 1

0999 320 Nozzle extensions complete 15 cm
0999 321 Nozzle extensions complete 30 cm
0999 322 Nozzle extensions complete 45 cm
0999 323 Nozzle extensions complete 60 cm
0097 020 Swivel elbow joint 2

Nozzle extensions with elbow joint 3

0096 015 Nozzle extensions complete 100 cm with swivel elbow joint
0096 016 Nozzle extensions complete 200 cm with swivel elbow joint
0096 017 Nozzle extensions complete 300 cm with swivel elbow joint

Gun insert (10 off)

0097 022 Filter insert, extra fine, 180 M/0.084 mm mesh size, red
0097 023 Filter insert, fine, 100 M/0.140 mm mesh size, yellow
0097 024 Filter insert, medium, 50 M/0.315 mm mesh size, white
0097 025 Filter insert, coarse 30 M/0.560 mm mesh size, green

TradeTip 2

LineFinish

Optimised nozzle for lining and marking work indoors and out.

→ Large selection of nozzles with different spray jet widths.

→ Clear lines

→ Sharp edges giving precise line boarders

	NOZZLE MARKING	BORE INCHES (MM)	LINE WIDTH	Order Ref. No.
15	1504	0,015 (0,38)	up to 70 mm	056 1504
	1508	0,015 (0,38)	up to 140 mm	056 1508
17	1704	0,017 (0,43)	up to 70 mm	056 1704
	1708	0,017 (0,43)	up to 140 mm	056 1708
19	1712	0,017 (0,43)	up to 210 mm	056 1712
	1904	0,019 (0,48)	up to 70 mm	056 1904
21	1908	0,019 (0,48)	up to 140 mm	056 1908
	1912	0,019 (0,48)	up to 210 mm	056 1912
	2108	0,021 (0,53)	up to 140 mm	056 2108
	2112	0,021 (0,53)	up to 210 mm	056 2112
	2308	0,023 (0,58)	up to 140 mm	056 2308
	2328	0,023 (0,58)	up to 300 mm	056 2328

TradeTip 2

FineFinish

Top painting nozzle for particularly high-grade surfaces

→ Optimal atomisation even in the low pressure ranges

→ Easy to use

→ Best painting quality

	NOZZLE MARKING	BORE INCHES (MM)	SPRAYING ANGLE	SPRAY JET WIDTH ¹	Order Ref. No.
8	208	0,008 (0,20)	20 °	120	0556 208
	308	0,008 (0,20)	30 °	150	0556 308
10	408	0,008 (0,20)	40 °	190	0556 408
	210	0,010 (0,25)	20 °	120	0556 210
12	310	0,010 (0,25)	30 °	150	0556 310
	410	0,010 (0,25)	40 °	190	0556 410
	510	0,010 (0,25)	50 °	225	0556 510
	212	0,012 (0,30)	20 °	120	0556 212
	312	0,012 (0,30)	30 °	150	0556 312
	412	0,012 (0,30)	40 °	190	0556 412
	512	0,012 (0,30)	50 °	225	0556 512
	612	0,012 (0,30)	60 °	270	0556 612
	214	0,014 (0,36)	20 °	120	0556 214
	314	0,014 (0,36)	30 °	150	0556 314
	414	0,014 (0,36)	40 °	190	0556 414
	514	0,014 (0,36)	50 °	225	0556 514
	614	0,014 (0,36)	60 °	270	0556 614

¹ Spray jet width (mm) at around 30 cm distance from the object and 100 bar pressure, with synthetic resin lacquer and, 20 DIN seconds.

www.wagner-group.com

TradeTip 2 holder

Holder, F-thread Order Ref. No. 0556 042

Holder, G-thread Order Ref. No. 0556 041

Holder, M18x1,5-thread Order Ref. No. 0556 040

Douple seal-set Order Ref. No. 0556 037

TradeTip 2

→ Compact

→ Released by hand

→ Unbreakable

→ Lightweight construction

Integral tool:

Easy insertion and removal of the seal.

Clear indication of the spraying direction or cleaning position.

TradeTip 2 Airless Nozzle System

Airless-Nozzles

1x1