

SYSTEM DATA SHEET

Sikafloor® MultiDur EB-39

BROADCASTED, TOUGH-ELASTIC, UNICOLOUR EPOXY FLOOR COVERING WITH HIGH CHEMICAL RESISTANCE

PRODUCT DESCRIPTION

Sikafloor® MultiDur EB-39 is a slip resistant, tough-elastic, coloured epoxy covering with high chemical resistance for flooring applications

USES

Sikafloor® MultiDur EB-39 may only be used by experienced professionals.

Crack-bridging and chemically resistant coating for concrete and screed surfaces in bund areas for the protection against water contaminating liquids (contact Sika technical service for specific information)

CHARACTERISTICS / ADVANTAGES


- High chemical resistance
- Crack-bridging
- Liquid proof

APPROVALS / STANDARDS

- Slip resistance certificate according to DIN 51130, class R12 V4, Report No.12 7465-S/15, MPI Institute, June 2015, Germany
- Slip resistance certificate according to DIN 51130, class R11 V4, Report No.020108-13-22, Roxeler Institute, October 2013, Germany

SYSTEM INFORMATION

System Structure

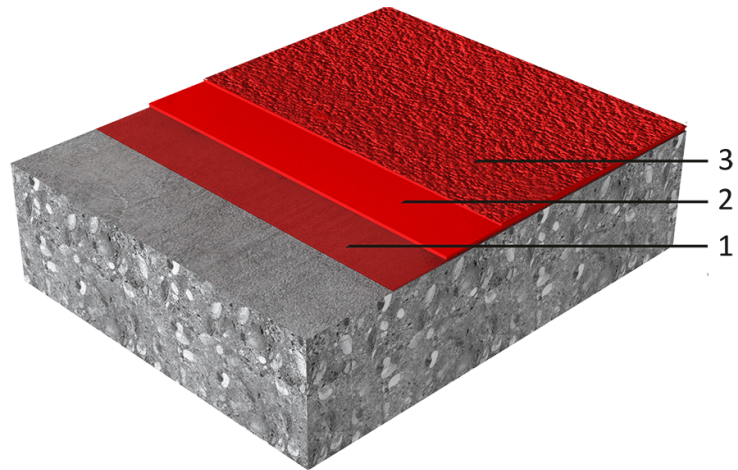

Sikafloor® MultiDur EB-39 system (~ 2–3 mm)

1. Primer	Sikafloor®-156/-161
2. Wearing coat & broadcast	Sikafloor®-390 N & broadcast with silicon carbide 0.5–1.0 mm or quartz sand 0.3–0.8 mm
3. Top coat	Sikafloor®-390 N + 5 % by weight Thinner C

Chemical base	Epoxy
Appearance	Slip resistant, gloss finish
Colour	Available in various colour shades.
Nominal Thickness	~2.0–3.0 mm

TECHNICAL INFORMATION

Chemical Resistance	Refer to the chemical resistance of Sikafloor®-390 N. Contact Sika technical service for specific information.									
Thermal Resistance	<table border="1"> <thead> <tr> <th>Exposure*</th> <th>Dry heat</th> </tr> </thead> <tbody> <tr> <td>Permanent</td> <td>+50 °C</td> </tr> <tr> <td>Short-term max. 7 d</td> <td>+80 °C</td> </tr> <tr> <td>Short-term max. 12 h</td> <td>+100 °C</td> </tr> </tbody> </table> <p>Short-term moist/wet heat* up to +80 °C where exposure is only occasional (i.e. during steam cleaning etc.) *No simultaneous chemical and mechanical exposure.</p>	Exposure*	Dry heat	Permanent	+50 °C	Short-term max. 7 d	+80 °C	Short-term max. 12 h	+100 °C	
Exposure*	Dry heat									
Permanent	+50 °C									
Short-term max. 7 d	+80 °C									
Short-term max. 12 h	+100 °C									
Skid / Slip Resistance	R12 V8 R11 V4	(DIN 51130) (DIN 51130)								

APPLICATION INFORMATION

Consumption	Sikafloor® MultiDur EB-39 system (~ 2–3 mm)		
	Coating System	Product	Consumption
	Primer	1 × Sikafloor®-156/-161	~0.3–0.5 kg/m ²
	Wearing coat	Sikafloor®-390 N (un-filled)	~ 1.6 kg/m ²
	Broadcast in excess	Silicon Carbide 0.5–1.0 mm or quartz sand 0.3–0.8 mm	~ 4–6 kg/m ²
	Top coat	Sikafloor®-390 N + 5 % by weight Thinner C	~0.75–0.85 kg/m ²

Product Temperature	Please refer to the individual Product Data Sheet
----------------------------	---

Ambient Air Temperature	+10 °C min. / +30 °C max.																										
Relative Air Humidity	80 % r.h. max.																										
Dew Point	Beware of condensation! The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or blooming on the floor finish.																										
Substrate Temperature	+10 °C min. / +30 °C max.																										
Substrate Moisture Content	When performing application work with Sikafloor® MultiDur EB-39, the substrate moisture content must not exceed 4 % pbw measured by Tramex. Test method: Sika®-Tramex meter, CM - measurement or Oven-dry-method. No rising moisture according to ASTM (Polyethylene-sheet).																										
Waiting Time / Overcoating	Before applying Sikafloor®-390 N on Sikafloor®-156/-161 allow: <table border="1"> <thead> <tr> <th>Substrate temperature</th> <th>Minimum</th> <th>Maximum</th> </tr> </thead> <tbody> <tr> <td>+10 °C</td> <td>24 hours</td> <td>4 days</td> </tr> <tr> <td>+20 °C</td> <td>12 hours</td> <td>2 days</td> </tr> <tr> <td>+30 °C</td> <td>8 hours</td> <td>1 day</td> </tr> </tbody> </table> Before applying Sikafloor®-390 N on Sikafloor®-390 N allow: <table border="1"> <thead> <tr> <th>Substrate temperature</th> <th>Minimum</th> <th>Maximum</th> </tr> </thead> <tbody> <tr> <td>+10 °C</td> <td>48 hours</td> <td>3 days</td> </tr> <tr> <td>+20 °C</td> <td>30 hours</td> <td>2 days</td> </tr> <tr> <td>+30 °C</td> <td>20 hours</td> <td>30 hours</td> </tr> </tbody> </table> Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.			Substrate temperature	Minimum	Maximum	+10 °C	24 hours	4 days	+20 °C	12 hours	2 days	+30 °C	8 hours	1 day	Substrate temperature	Minimum	Maximum	+10 °C	48 hours	3 days	+20 °C	30 hours	2 days	+30 °C	20 hours	30 hours
Substrate temperature	Minimum	Maximum																									
+10 °C	24 hours	4 days																									
+20 °C	12 hours	2 days																									
+30 °C	8 hours	1 day																									
Substrate temperature	Minimum	Maximum																									
+10 °C	48 hours	3 days																									
+20 °C	30 hours	2 days																									
+30 °C	20 hours	30 hours																									
Applied Product Ready for Use	<table border="1"> <thead> <tr> <th>Temperature</th> <th>Foot traffic</th> <th>Light traffic</th> <th>Full cure</th> </tr> </thead> <tbody> <tr> <td>+10 °C</td> <td>~ 48 hours</td> <td>~ 6 days</td> <td>~ 10 days</td> </tr> <tr> <td>+20 °C</td> <td>~ 30 hours</td> <td>~ 4 days</td> <td>~ 7 days</td> </tr> <tr> <td>+30 °C</td> <td>~ 20 hours</td> <td>~ 3 days</td> <td>~ 5 days</td> </tr> </tbody> </table> For traffic with solid / hard wheeled lift trucks allow 3 weeks curing time.	Temperature	Foot traffic	Light traffic	Full cure	+10 °C	~ 48 hours	~ 6 days	~ 10 days	+20 °C	~ 30 hours	~ 4 days	~ 7 days	+30 °C	~ 20 hours	~ 3 days	~ 5 days										
Temperature	Foot traffic	Light traffic	Full cure																								
+10 °C	~ 48 hours	~ 6 days	~ 10 days																								
+20 °C	~ 30 hours	~ 4 days	~ 7 days																								
+30 °C	~ 20 hours	~ 3 days	~ 5 days																								

PRODUCT INFORMATION

Packaging	Please refer to the individual Product Data Sheets
Shelf Life	Please refer to the individual Product Data Sheets
Storage Conditions	Please refer to the individual Product Data Sheets

MAINTENANCE

CLEANING

Please refer to the Information Manual Sikafloor®-Cleaning Regime

FURTHER DOCUMENTS

- Sika® Information Manual Mixing & Applications of Flooring systems
- Sika® Information Manual Evaluation and Preparation of Surfaces for Flooring systems

LIMITATIONS

- Do not apply Sikafloor® MultiDur EB-39 on substrates with rising moisture.
- Freshly applied Sikafloor® MultiDur EB-39 must be protected from damp, condensation and water for at least 24 hours.

- The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking.
- For exact colour matching, ensure the Sikafloor®-390 N in each area is applied from the same control batch numbers.
- Under certain conditions, underfloor heating or high ambient temperatures combined with high point loading, may lead to imprints in the resin.
- If heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO₂ and H₂O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

VALUE BASE

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

SIKA LIMITED

Watchmead

Welwyn Garden City
Hertfordshire, AL7 1BQ
Tel: 01707 394444
Web: www.sika.co.uk
Twitter: @SikaLimited

SIKA IRELAND LIMITED

Ballymun Industrial Estate

Ballymun
Dublin 11, Ireland
Tel: +353 1 862 0709
Web: www.sika.ie
Twitter: @SikaIreland



SikafloorMultiDurEB-39_en_GB_(06-2017)_2_1.pdf

System Data Sheet
Sikafloor® MultiDur EB-39
June 2017, Version 02.01
020811900000000043