

## SYSTEM DATA SHEET

# Sikafloor® MultiDur ES-46 ESD

Epoxy and polyurethane combination ESD flooring system

### PRODUCT DESCRIPTION

Sikafloor® MultiDur ES-46 ESD is an epoxy and polyurethane combination ESD flooring system. The system is designed to dissipate electrostatic charges (ESD) and protect personnel and sensitive equipment in electrostatic protected areas (EPA).

### USES

Sikafloor® MultiDur ES-46 ESD may only be used by experienced professionals.

Industrial resin flooring on cementitious substrates for:

- Electrostatic protected areas (EPA)
- Areas requiring the lowest electrostatic charge (low BVG (Body Voltage Generation)) and dissipative surface
- Electronic production areas
- Automotive production plants
- Microbiology/microchemistry production areas
- Telephone exchanges
- Computer / server rooms
- Interior use only

### CHARACTERISTICS / ADVANTAGES

- Thickness ~1,5–2,0 mm
- Low VOC emissions top coat
- Water-based ESD top coat
- Easy to apply
- Easy to refurbish, topcoat can be recoated
- Top coat resistant to UV exposure
- Improved yellowing resistant top coat
- Easy to clean
- Conforms to the requirements of ANSI/ESD S20.20 and IEC 61340-5-1
- Smooth matt surface finish
- Chemical resistant top coat

### ENVIRONMENTAL INFORMATION

Conformity with LEED v2009 IEQc 4.2: Low-Emitting Materials - Paints and Coatings - Sikafloor®-305 W ESD.


### APPROVALS / STANDARDS

- CE Marking and Declaration of Performance to EN 1504-2 - Surface protection product for concrete - Coating.
- CE Marking and Declaration of Performance to EN 13813 - Resin screed material for internal use in buildings.

# SYSTEM INFORMATION

## System Structure

## Sikafloor® MultiDur ES-46 ESD (~ 1,5–2,0 mm)

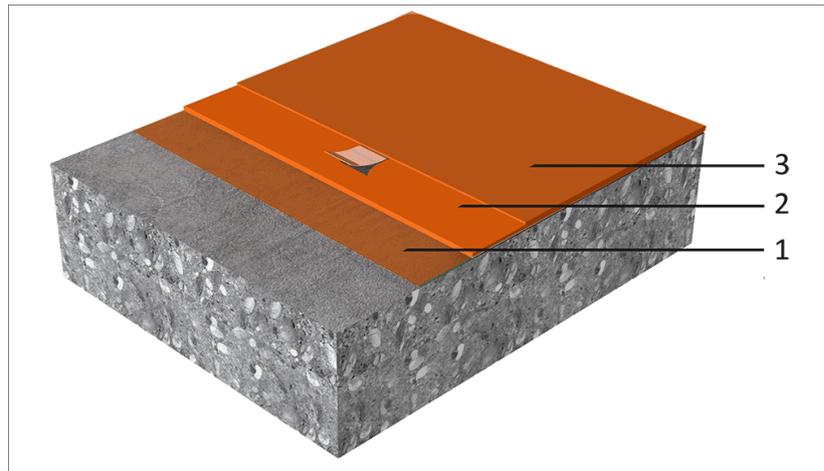

Layer	Product
1. Primer	Sikafloor®-150/-151
2. Base coat + earthing connection	Sikafloor®-263 SL N/-264 N + Sika® Earthing Kit
3. ESD top coat	Sikafloor®-305 W ESD

The system structure layers as described in table must not be changed.

Composition	Base coat	Epoxy
	ESD top coat	Water-based polyurethane

Appearance	Smooth matt finish
------------	--------------------

Nominal thickness	~1,5–2,0 mm
-------------------	-------------

## TECHNICAL INFORMATION

Tensile adhesion strength	> 1,5 N/mm <sup>2</sup>	(ISO 4624)
---------------------------	-------------------------	------------

Chemical Resistance	Sikafloor®-305 W ESD provides the chemical resistance. Refer to Product Data Sheet.	
---------------------	---	--

USGBC LEED Rating	Sikafloor®-305 W ESD conforms to the requirements of LEED EQ Credit 4.2: Low-Emitting Materials: Paints & Coatings. Reference Test Method 304: VOC Content < 100 g/l.	
-------------------	---	--

Electrostatic Behaviour	Resistance to ground <sup>1</sup>	$R_g < 10^9 \Omega$	(IEC 61340-4-1)
	Typical average resistance to ground <sup>2</sup>	$R_g < \sim 10^5\text{--}10^6 \Omega$	(DIN EN 1081)
	Body voltage generation <sup>2</sup>	< 100 V	(IEC 61340-4-5)
	System Resistance (Person/Floor/Shoe)	$R_g < 10^9 \Omega$	(IEC 61340-4-5)

<sup>1</sup> In accordance with IEC 61340-5-1 and ANSI/ESD S20.20.

<sup>2</sup> Readings may vary, depending on ambient conditions (i.e. temperature, humidity) and measurement equipment.

## APPLICATION INFORMATION

Consumption	Layer	Product	Consumption
	1.Primer	Sikafloor®-150/-151	1–2 × ~ 0,3–0,5 kg/m <sup>2</sup>
	2.Levelling (if required)	Sikafloor®-150/-151 levelling mortar	Refer to PDS of Sikafloor®-150/-151
	3.Base coat	Sikafloor®-263 SL N /-264 N filled with quartz sand F34	~1,9–2,7 kg/m <sup>2</sup> Binder + quartz sand F 34: 1:0,6–1:1 pbw (Depending on the air temperature the filling grade varies)
	4.Earthing connection	Sika® Earthing Kit	1 earthing point per ~200–300 m <sup>2</sup> . 2 per room minimum
	5.ESD coating	Sikafloor®-305 W ESD	1–2 × 0,18–0,2 kg/m <sup>2</sup> /layer

These figures are theoretical and do not allow for any additional material due to surface porosity, surface profile, variations in level and wastage etc. When used in high wear conditions, e.g. castor chairs, a second layer of Sikafloor®-305 W ESD improves the mechanical properties of the final coating.

<b>Product Temperature</b>	+10 °C min. / +30 °C max.																																					
<b>Ambient Air Temperature</b>	+10 °C min. / +30 °C max.																																					
<b>Relative Air Humidity</b>	During curing the humidity must not exceed 75 %. There must be a sufficient supply of fresh air or a dehumidifier to remove excess moisture from cured water based products.																																					
<b>Dew Point</b>	Beware of condensation. The substrate and uncured applied floor material must be at least +3 °C above dew point to reduce the risk of condensation or blooming on the surface of the applied product.																																					
<b>Substrate Temperature</b>	+10 °C min. / +30 °C max.																																					
<b>Substrate Moisture Content</b>	≤ 4 % parts by weight. The following test methods can be used: Sika®-Tramex meter, CM - measurement or Oven-dry-method. No rising moisture according to ASTM (Polyethylene-sheet).																																					
<b>Waiting Time / Overcoating</b>	<p>Before applying Sikafloor®-263 SL N /-264 N on Sikafloor®-150/-151 allow:</p> <table border="1"> <thead> <tr> <th>Substrate temperature</th> <th>Minimum</th> <th>Maximum</th> </tr> </thead> <tbody> <tr> <td>+10 °C</td> <td>24 hours</td> <td>4 days</td> </tr> <tr> <td>+20 °C</td> <td>12 hours</td> <td>2 days</td> </tr> <tr> <td>+30 °C</td> <td>8 hours</td> <td>1 days</td> </tr> </tbody> </table> <p>Before applying Sikafloor®-305 W ESD on Sikafloor®-263 SL N /-264 N allow:</p> <table border="1"> <thead> <tr> <th>Substrate temperature</th> <th>Minimum</th> <th>Maximum</th> </tr> </thead> <tbody> <tr> <td>+10 °C</td> <td>36 hours</td> <td>7 days</td> </tr> <tr> <td>+20 °C</td> <td>24 hours</td> <td>5 days</td> </tr> <tr> <td>+30 °C</td> <td>16 hours</td> <td>3 days</td> </tr> </tbody> </table> <p>Before applying Sikafloor®-305 W ESD on Sikafloor®-305 W ESD allow:</p> <table border="1"> <thead> <tr> <th>Substrate temperature</th> <th>Minimum</th> <th>Maximum</th> </tr> </thead> <tbody> <tr> <td>+10 °C</td> <td>48 hours</td> <td>10 days</td> </tr> <tr> <td>+20 °C</td> <td>24 hours</td> <td>8 days</td> </tr> <tr> <td>+30 °C</td> <td>16 hours</td> <td>7 days</td> </tr> </tbody> </table> <p>Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.</p>		Substrate temperature	Minimum	Maximum	+10 °C	24 hours	4 days	+20 °C	12 hours	2 days	+30 °C	8 hours	1 days	Substrate temperature	Minimum	Maximum	+10 °C	36 hours	7 days	+20 °C	24 hours	5 days	+30 °C	16 hours	3 days	Substrate temperature	Minimum	Maximum	+10 °C	48 hours	10 days	+20 °C	24 hours	8 days	+30 °C	16 hours	7 days
Substrate temperature	Minimum	Maximum																																				
+10 °C	24 hours	4 days																																				
+20 °C	12 hours	2 days																																				
+30 °C	8 hours	1 days																																				
Substrate temperature	Minimum	Maximum																																				
+10 °C	36 hours	7 days																																				
+20 °C	24 hours	5 days																																				
+30 °C	16 hours	3 days																																				
Substrate temperature	Minimum	Maximum																																				
+10 °C	48 hours	10 days																																				
+20 °C	24 hours	8 days																																				
+30 °C	16 hours	7 days																																				

## Applied Product Ready for Use

Temperature	Foot traffic	Light traffic	Full cure
+10 °C	~48 hours	~5 days	~10 days
+20 °C	~24 hours	~3 days	~8 days
+30 °C	~16 hours	~2 days	~7 days

Times are approximate and will be affected by changing ambient conditions

## VALUE BASE

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## FURTHER DOCUMENTS

- Sika Method Statement: Sikafloor®-Cleaning Regime.
- Sika Method Statement: Mixing & Applications of Flooring Systems.
- Sika Method Statement: Evaluation and Preparation of Surfaces for Flooring Systems.
- Sika Method Statement: Sikafloor®-305 W ESD.
- Individual Product Data Sheets within the flooring system.

## LIMITATIONS

- Epoxy surfaces must be abraded e.g. with a 3M™ Brown Stripper Pad in combination with low speed automatic scrubbers or rotary floor machines (175–600 rpm) to ensure a optimum adhesion of Sikafloor®-305 W ESD.
- Do not apply Sikafloor® MultiDur ES-46 ESD on substrates with rising moisture.
- After application, all the products must be protected from damp, condensation and water for at least 24 hours.
- Uncured material reacts in contact with water (foaming).
- During application care must be taken that no sweat falls onto the fresh Sikafloor® products. Wear head and wrist bands.
- The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking.
- Sikafloor®-305 W ESD must be diluted with 10 % water.
- Apply Sikafloor®-305 W ESD only to the tack free surface of Sikafloor®-263 SL N/-264 N resin.
- Ensure adequate ventilation during application and drying especially at temperatures less than +13 °C, otherwise the reaction and drying processes may be affected.
- When applying Sikafloor®-305 W ESD, lower consumption can cause roller marks, gloss differences and irregular surface structure. Higher consumption results in water retention and can cause pigment floatation as well as unsatisfactory conductivity.
- If the floor is exposed to chemical and / or mechanical loads, the conductivity must be checked regularly. If necessary to maintain the specified conductivity, Sikafloor®-305 W ESD must be refreshed. This must be coordinated with the authorised ESD-representative or equivalent.
- For exact colour matching, ensure the Sikafloor®

MultiDur ES-46 ESD in each area is applied from the same control batch numbers.

- Do not apply on substrates with a slope more than 1 %.
- Under certain conditions, under floor heating or high ambient temperatures combined with high point loading, may lead to indentations in the resin.
- If temporary heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO<sub>2</sub> and H<sub>2</sub>O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.
- Sika does not assume any liability for possible changes in the composition of the recommended cleaning and maintenance agents and their effects on the floor characteristics.
- Measurement results can be affected by ESD clothing, ambient conditions, measurement equipment, cleanliness of the floor and test personnel.
- ESD-footwear must fulfil the requirements of DIN EN 61340-4-3 (Climate 2, resistance < 5 M Ohm).
- Rubber tyres may produce dark marks on the Sikafloor®-305 W ESD from plasticiser migration.
- If their are increased demands on the cleanability, Sikafloor®-305 W ESD can be over coated with the static dissipative floor polish "Jontec ESD" or "Jontec Destat" from Diversey Care or equivalent. Refer to the cleaning regime of Sikafloor®-305 W ESD.

All measurement values for the Sikafloor® MultiDur ES-46 ESD system stated in the System Data Sheet (except those referring to proof statements) were measured under the following conditions:

Size of ESD-footwear:	42 (EU) (UK: 8; US: 8,5)
Weight test person:	90 kg
Ambient conditions:	+23 °C/50 %
Measuring device for measuring resistance to ground:	Metriso 2000 or 3000 (Warmbier) or comparable
Surface resistance probe:	Carbon Rubber electrode. Weight: 2,50 kg
Rubber pad hardness:	Shore A 60 (± 10)
Measuring device for measuring body voltage generation:	Walking Test Kit WT 5000 (Warmbier) or comparable

The number of conductivity measurements is recommended in the table below:

Ready applied area	Number of measurements
<10 m <sup>2</sup>	6 measurements
<100 m <sup>2</sup>	10–20 measurements
<1000 m <sup>2</sup>	50 measurements
< 5000 m <sup>2</sup>	100 measurements

If values are lower/higher than required, additional measurements must be carried out, ~30 cm around the point where the faulty readings are located. If the re-measured values are in accordance with the re-

quirements, the total area is acceptable.  
Installation of earthing points: Refer to Sika® Method Statement: Mixing & Applications of Flooring Systems.  
Numbers of earth connections per room: Minimum of 2 earthing points. The optimum number of earth connections depends on the local conditions and must be specified on available drawings or other contract documentation.

## ECOLOGY, HEALTH AND SAFETY

User must read the most recent corresponding Safety Data Sheets (SDS) before using any products. The SDS provides information and advice on the safe handling, storage and disposal of chemical products and contains physical, ecological, toxicological and other safety-related data.

### DIRECTIVE 2004/42/CE - LIMITATION OF EMISSIONS OF VOC

According to the EU-Directive 2004/42, the maximum allowed content of VOC (Product category IIA / j type wb) is 140 g/l (Limit 2010) for the ready to use product.

The maximum content of Sikafloor-305 W ESD is < 140 g/l VOC for the ready to use product.

## MAINTENANCE

### CLEANING

Refer to Method Statement: Sikafloor®-Cleaning Regime.

## LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

### SIKA LIMITED

Watchmead  
Welwyn Garden City  
Hertfordshire, AL7 1BQ  
Tel: 01707 394444  
Web: [www.sika.co.uk](http://www.sika.co.uk)  
Twitter: @SikaLimited



System Data Sheet  
Sikafloor® MultiDur ES-46 ESD  
December 2022, Version 01.01  
020811900000000115

SikafloorMultiDurES-46ESD-en-GB-(12-2022)-1-1.pdf