

BEDEC

THE PAINT COMPANY



Product Range



Perfecting Water-Based Paint for over 50 Years

BEDEC The Paint Company was created in the early 1970's by two experienced paint chemists, Brian Higgins and David Horn who were driven by a passion to create superior quality paint products.



Their story is one of gathering together a very knowledgeable team committed to enhancing customer experiences, whilst gaining a reputation as **innovators in water based technology**.

The company grew mainly through word of mouth recommendation, promoting their specialist problem solving products.

BEDEC remain a British owned family business committed to environmentally friendly and sustainable products fit for the modern world.

BEDEC products are often imitated **but never equalled**



Weathering tests on our products



MADE IN BRITAIN



MSP

(Multi Surface Paint)

The iconic and original Multi Surface, water based, **interior**, **exterior** self-priming and self-undercoating paint that takes the thinking out of painting.

Developed in the early 1990's as a water based surface coating that can be applied to almost any surface, MSP was a forerunner to many of today's all purpose paints and changed coating specifications forever.

With minimal marketing and gradual word of mouth, MSP has established itself as a product of quality and reliability and remains the go to Multi Surface Paint for DIY decorators as well as professional and commercial contractors.

MSP is manufactured at our UK factory in Essex, where continual research and development ensure this product remains at the forefront of paint technology.



Beach Huts: MSP Gloss

Why choose this paint?



WATER BASED	INTERIOR & EXTERIOR	MULTI SURFACE	SELF PRIMING SELF UNDERCOATING	ALKALI RESISTANT	QUICK DRYING	MINIMAL ODOUR	MICROPOROUS BREATHABLE
FLEXIBLE	HEAT RESISTANT (UP TO 80°C)	100% UV PROTECTION	EXCELLENT COLOUR RETENTION	NON YELLOWING	NON FLAMMABLE	EXCELLENT DURABILITY	EASY TO CLEAN UP WITH WATER

Properties

Application	Brush, Roller, Spray
Coverage	12-14m ² /Ltr*
Touch Dry	<2 Hours**
Recoatable	4 Hours**
Finishes	Gloss, Satin, Matt, Metallics
Sizes	250ml, 750ml, 2.5L, 5L, 20L

Available Colours

[See BEDEC Colour Card](#)

Other colours available to order

* Depending on surface texture and method of application
 ** Based on a temperature of 18°C and relative humidity of 65%
NOTE: On porous surfaces we recommend a first coat diluted by 30% with clean water
NOTE: Smooth surfaces should be lightly abraded to provide a key

Perfect for use on

- ✓ Wood¹
- ✓ Plastic/UPVC
- ✓ Aluminium
- ✓ Galvanized Steel/Zinc
- ✓ Bricks³
- ✓ Plaster
- ✓ Iron/Steel²
- ✓ MDF
- ✓ Melamine
- ✓ Previously painted surfaces
- ✓ Cladding⁵
- ✓ Powder Coating
- ✓ Acoustic Tiles
- ✓ Drywall
- ✓ Chipboard
- ✓ Masonry/Render
- ✓ Asbestos
- ✓ Powder Coating
- ✓ Lead
- ✓ Terracotta
- ✓ Stucco
- ✓ Slates
- ✓ Fibreglass (GRP)
- ✓ Copper
- ✓ Concrete
- ✓ Tarmac
- ✓ Felt
- ✓ Brass
- ✓ Marble
- ✓ Cement Fibre Board
- ✓ Tiles Ceramic⁴
- ✓ Glass^A
- ✓ Varnish/Woodstain
- ✓ Can be painted over Weathered Bitumen, Creosote, and Tar Varnish
- ✓ Fascia and Soffits

Δ Paint internal surface only
 1. For woods liable to staining we suggest priming with BEDEC ALL PRIME or BEDEC STAIN BLOCK
 2. Anti-corrosive primer such as BEDEC ALL PRIME or BEDEC METAL PRIMER is needed for bare ferrous metals
 3. Not on Fletton bricks, stocks, or Engineering Bricks
 4. Not recommended for use in shower cubicles or areas under constant water contact
 5. Including Wood, Metal, Plastic and composite Cladding



Barn Paint

Barn Paint is a tough and highly durable water based acrylic paint suited to the protection of exterior buildings.

For excellent resistance against:

- ✓ Cracking blistering and flaking
- ✓ Rain and severe weather
- ✓ Rot and Algal buildup
- ✓ Sunlight (UV)

Barn Paint is ideally suited to the protection of exterior buildings such as barns, outbuildings, sheds, silos, windmills, and factory units (corrugated and metal box cladding).

This acrylic system is a tough, durable microporous protective coating with excellent colour retention. It will flex with the substrate and exhibits reduced flaking and blistering. Two or three coats can be applied quickly within one day, especially during the summer months.

This product was initially formulated for restoration work on Essex barns, but local farmers found it to be an excellent replacement for Tar Varnish and Bitumen in protecting outbuildings.

FOR: WOOD, GALVANISED, PLASTIC, CONCRETE, BRICKS & CLADDING.



Barn Paint Black Semi Gloss

Why choose this paint?



WATER BASED	EXTERIOR ONLY	MULTI SURFACE	SELF PRIMING SELF UNDERCOATING	USE OVER OLD PAINT	EASY TO APPLY	ALKALI RESISTANT	QUICK DRYING
MICROPOROUS BREATHABLE	FLEXIBLE	100% UV PROTECTION	EXCELLENT COLOUR RETENTION	NON YELLOWING	WEATHER RESISTANT	EXCELLENT DURABILITY	EASY TO CLEAN UP WITH WATER

Properties

Application	Brush, Roller, Spray
Coverage	13-15m ² /Ltr*
Touch Dry	<2 Hours**
Recoatable	4 Hours**
Finishes	Semi Gloss, Satin, Matt
Sizes	2.5L, 5L, 20L

Available Colours

See BEDEC Colour Card

Other colours available to order

* Depending on surface texture and method of application
 ** Based on a temperature of 18°C and relative humidity of 65%

NOTE: On porous surfaces we recommend a first coat diluted by 30% with clean water

NOTE: Treated timber should be left to weather for 6 months before painting

NOTE: Smooth surfaces should be lightly abraded to provide a key

NOTE: Not recommended for substrates which have had water-repellent preservative treatments applied

Perfect for use on

- ✓ Exterior Wood¹
- ✓ Cladding⁴
- ✓ Can be painted over Weathered Bitumen, Creosote and Tar Varnish
- ✓ Plastic / UPVC
- ✓ Iron/Steel²
- ✓ Masonry/Render
- ✓ Aluminium
- ✓ Asbestos
- ✓ Galvanized Steel / Zinc
- ✓ Concrete
- ✓ Fibreglass (GRP)
- ✓ Composite
- ✓ Copper
- ✓ Bricks³
- ✓ Stone
- ✓ Terracotta
- ✓ Brass
- ✓ Previously painted surfaces
- ✓ Powder Coating
- ✓ Lead
- ✓ Stucco
- ✓ Slates
- ✓ Tarmac
- ✓ Felt
- ✓ Cement Fibre Board
- ✓ Varnish/Wood Stain
- ✓ Fascia and Soffits

1. For woods liable to staining we suggest priming with BEDEC ALL PRIME or BEDEC STAIN BLOCK

2. Anti-corrosive primer such as BEDEC ALL PRIME or BEDEC METAL PRIMER is needed for bare ferrous metals

3. Not on Fletton bricks, stocks, or Engineering Bricks

4. Including Wood, Metal, Plastic and composite Cladding



Aqua Advanced

The Aqua Advanced range is a family of quick drying, water based products formulated for the professional decorator in mind.

Developed as a high quality trim paint to rival traditional oil based systems, this internal and external paint exhibits excellent flow out, coverage, and levelling. The Acrylic polyurethane enamel enables these paints to dry to a tough finish, which offers excellent block resistance and durability. Aqua Advanced is non yellowing and can be painted on almost any surface to provide a long lasting surface coating.

Designed as a three coat system, we recommend using Aqua Advanced Primer Undercoat, followed by two top coats of Aqua Advanced Gloss, Satin, Eggshell, or Matt.



Door: Aqua Advanced Black Satin Trim: Aqua Advanced White Gloss

Why choose this paint?



WATER BASED	INTERIOR & EXTERIOR	MULTI SURFACE	GOOD FLOW	EXCELLENT COVERING POWER	ADVANCED LEVELLING	QUICK DRYING	MINIMAL ODOUR
POLYURETHANE TOUGHENED	MICROPOROUS BREATHABLE	100% UV PROTECTION	HIGH QUALITY	EXCELLENT COLOUR RETENTION	NON YELLOWING	EXCELLENT DURABILITY	EASY TO CLEAN UP WITH WATER

Properties

Application	Brush, Roller, Spray
Coverage	13-15m ² /Ltr*
Touch Dry	<2 Hours**
Recoatable	4 Hours**
Finishes	Gloss, Satin, Eggshell, Matt
Sizes	1L, 2.5L, 5L

Available Colours



Other colours available to order

* Depending on surface texture and method of application
 ** Based on a temperature of 18°C and relative humidity of 65%

NOTE: On porous surfaces we recommend a first coat diluted by 30% with clean water

NOTE: On existing painted or shiny surfaces rub down with abrasive paper

Perfect for use on

- ✓ Wood¹
 - ✓ Plastic
 - ✓ UPVC
 - ✓ Metal²
- Trim areas such as:**
- ✓ Windows
 - ✓ Skirting
 - ✓ Architrave
 - ✓ Doors
 - ✓ Fascia and Soffits
 - ✓ All types of joinery



1. For woods liable to staining we suggest priming with BEDEC ALL PRIME or BEDEC STAIN BLOCK

2. Anti-corrosive primer such as BEDEC ALL PRIME or BEDEC METAL PRIMER is needed for bare ferrous metals



SDL

- ✓ Anti-reflective
- ✓ Flat Matt 2%

SDL (Spray Day Light) is a water based, quick drying, flat matt for use on **walls, ceilings, plaster, and drywall**. Designed for application by spray, brush, or roller with minimal splatter.

- ✓ **Low flashing** - less than 2% sheen. Disguises imperfections and uneven surfaces on walls and ceilings.
- ✓ **Delivers excellent coverage** - with minimal paint needed.
- ✓ **Bright white finish** - stands out compared to other brands with its exceptional whiteness and non-yellowing.
- ✓ **Easy to wipe clean** and ideal for high traffic areas such as halls, staircases, and corridors.
- ✓ **Minimal levels of VOC and low odour** make SDL perfect for interior use.



Walls and Ceiling: SDL White Matt

Why choose this paint?



WATER BASED	INTERIOR ONLY	FLAT MATT (<2% SHEEN)	ANTI-REFLECTIVE	LOW FLASHING	EXCELLENT COVERING POWER	ALKALI RESISTANT	LOW SPLATTER
QUICK DRYING	MINIMAL ODOUR	GOOD SCRUB-RESISTANCE	MICROPOROUS BREATHABLE	NON YELLOWING	NON FLAMMABLE	EXCELLENT DURABILITY	EASY TO CLEAN UP WITH WATER

Properties

Application	Brush, Roller, Spray
Coverage	10m ² /Ltr*
Touch Dry	2 Hours**
Recoatable	4 Hours**
Finishes	Matt
Sizes	5L

Available Colours

Bright White

Other colours available to order

* Depending on surface texture and method of application

** At a temperature of 18°C and relative humidity of 65%

NOTE: On Porous surfaces we recommend a first coat diluted by 30% with clean water

Perfect for use on

✓ Walls

✓ Ceilings



BEDEC
THE PAINT COMPANY



All Prime

All Prime, is an all surface, all purpose, quick drying primer with a wide range of uses.















This water based product is formulated to act as a stain blocker, metal primer and rust inhibitor and is ideal for priming most surfaces including metal and wood with knots, sap and tannin stains.

All Prime is a:

- ✓ Wood Primer
- ✓ Stain Blocker
- ✓ Metal Primer
- ✓ Rust Inhibitor



















Stain blocking guide

 Water Stain	 Smoke Fire Damage	 Crayon
 Permanent Ink	 Lipstick	 Rust
 Sap Knots	 Varnish	 Bitumen
 Fire Damage	 Grease	 Mildew Mould
 Nicotine/ Tobacco	 Asphalt	

Why choose this paint?



 WATER BASED	 INTERNAL & EXTERNAL	 ALL SURFACE PRIMER	 BOND COATING	 STAIN BLOCKING	 WOOD PRIMING ¹	 METAL PRIMING ²	 RUST INHIBITING
 WOOD KNOTS, SAP, TANNIN STAINS	 WHITE OR DARK GREY	 ALKALI RESISTANT	 QUICK DRYING	 MINIMAL ODOUR	 PROMOTES ADHESION	 EXCELLENT DURABILITY	 EASY TO CLEAN UP WITH WATER

Properties

 Application	Brush, Roller, Spray
 Coverage	10m ² /Ltr*
 Touch Dry	<2 Hours**
 Recoatable	4 Hours**
 Sizes	750ml, 2.5L, 5L

Available Colours

Dark Grey

White

Other colours available to order

* Depending on surface texture and method of application
 ** At a temperature of 18°C and relative humidity of 65%
 NOTE: On severe staining additional coats may be required
 NOTE: On porous surfaces we recommend a first coat diluted by 30% with clean water
 NOTE: Smooth surfaces should be lightly abraded to provide a key

Perfect for priming

- | | | |
|-----------------------|---------------------|---------------------------|
| ✓ Wood ¹ | ✓ Brick | ✓ Varnish/
Woodstain |
| ✓ Metals ² | ✓ Ceramics | ✓ Panelling/
Laminates |
| ✓ Ceilings | ✓ Steel | ✓ Acoustic
Tiles |
| ✓ Doors | ✓ MDF | ✓ Lead |
| ✓ Trim | ✓ Fibreglass | ✓ UPVC |
| ✓ Fascia & Soffits | ✓ GRP | ✓ Copper |
| ✓ Railings | ✓ Aluminium | ✓ Glass |
| ✓ Drywall | ✓ Wall Tiles | ✓ Stucco |
| ✓ Plaster | ✓ Gloss
Paint | ✓ Asbestos |
| ✓ Concrete | ✓ Powder
Coating | |
| ✓ MDF | | |



1. Ideal for HARD and SOFT WOOD
 2. Can be applied to all metals



Interior-Flex

Interior-Flex is an **elastomeric** smooth low sheen emulsion paint formulated to coat interior ceilings and walls.

Interior-Flex is a unique product designed to bridge hairline cracks and flex with the substrate where movement causes cracking with conventional matt emulsion.



Walls and Ceiling: Interior Flex White Matt

Why choose this paint?



WATER BASED	INTERIOR	SELF PRIMING SELF UNDERCOATING	CRACK BRIDGING	ELASTOMERIC	USE OVER OLD PAINT	SMOOTH LOW SHEEN FINISH	EXCELLENT COVERING POWER
ALKALI RESISTANT	LOW SPLATTER	QUICK DRYING	MINIMAL ODOUR	MICROPOROUS BREATHABLE	FLEXIBLE	NON YELLOWING	EASY TO CLEAN UP WITH WATER

Properties

Application	Brush, Roller, Spray
Coverage	9-11m ² /Ltr*
Touch Dry	<2 Hours**
Recoatable	4 Hours**
Finishes	Smooth Low Sheen
Sizes	2.5L, 5L

Perfect for use on

- ✓ Walls
- ✓ Ceilings
- ✓ Drywall
- ✓ Plaster
- ✓ MDF
- ✓ Chipboard
- ✓ Asbestos
- ✓ Painted surfaces

Available Colours

Brilliant White

Magnolia

Other colours available to order



* Depending on surface texture and method of application

** At a temperature of 18°C and relative humidity of 65%

NOTE: On Porous surfaces we recommend a first coat diluted by 30% with clean water

BEDEC
THE PAINT COMPANY



Extra-Flex

Masonry Paint

Extra-Flex is a premium quality, smooth, **elastomeric** masonry paint which provides a professional finish with outstanding protection.

This modified acrylic blend is a flexible microporous protective coating that will fill and bridge hair line cracks and flex with the building where movement causes cracking in conventional masonry paint.

Extra-Flex is certificated as an anti-carbonation coating and can also be applied to previously painted surfaces after suitable preparation.



Walls: Extra Flex White

Why choose this paint?

MADE IN BRITAIN

WATER BASED	EXTERIOR	CRACK BRIDGING	ELASTOMERIC (STRETCHES UP TO 400%)	USE OVER OLD PAINT	SMOOTH FINISH	ANTI CARBONATION	ALKALI RESISTANT
QUICK DRYING	MICROPOROUS BREATHABLE	FLEXIBLE	100% UV PROTECTION	NON YELLOWING	WEATHER RESISTANT	EXCELLENT DURABILITY	EASY TO CLEAN UP WITH WATER

Properties

Application	Brush, Roller, Spray
Coverage	9-11m ² /Ltr*
Touch Dry	<2 Hours**
Recoatable	4 Hours**
Finishes	Smooth Low Sheen
Sizes	5L

Available Colours

See BEDEC Colour Card

Other colours available to order

* Depending on surface texture and method of application


** At a temperature of 18°C and relative humidity of 65%

NOTE: On Porous surfaces we recommend a first coat diluted by 30% with clean water


NOTE: A stabilizer solution is not required

Perfect for use on

- ✓ Exterior Masonry
- ✓ Roughcast
- ✓ Pebble-dash
- ✓ Brickwork¹
- ✓ Stucco
- ✓ Cement
- ✓ Concrete render

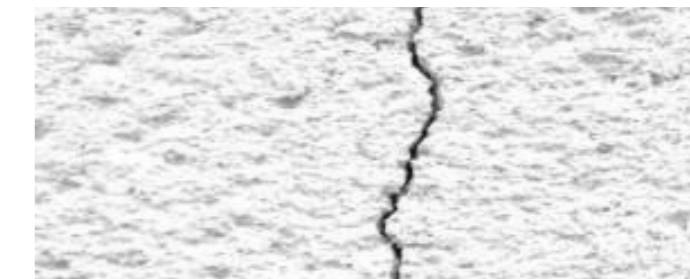

Before

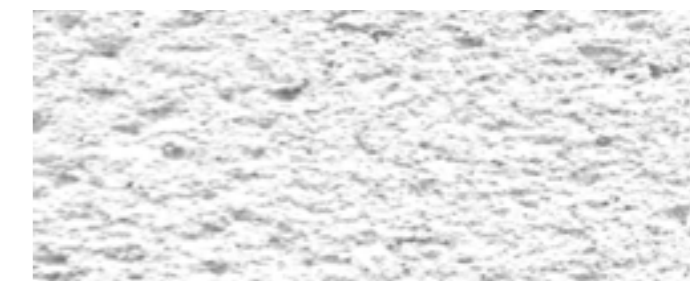

After

¹ Not on Fletton, stocks, or Engineering Bricks

BEDEC
THE PAINT COMPANY



Super-Flex

Super-Flex is ideal for roofs, walls and economically prevents or cures all types of leaking roofs, tiles and walls.

This flexible **elastomeric** coating can be quickly applied by brush, roller, or spray to form a high build, seamless waterproof membrane which allows for movement of the underlying substrate for a long life protection.



Roof: Super-Flex Green

Why choose this paint?

MADE IN BRITAIN


WATER BASED	EXTERIOR	CRACK BRIDGING	ELASTOMERIC (STRETCHES UP TO 400%)	SMOOTH FINISH	ANTI CARBONATION	HIGH BUILD	ALKALI RESISTANT
QUICK DRYING	MICROPOROUS BREATHABLE	FLEXIBLE	100% UV PROTECTION	NON YELLOWING	WEATHER RESISTANT	EXCELLENT DURABILITY	EASY TO CLEAN UP WITH WATER

Properties


Application	Brush, Roller, Spray
Coverage	Roofs: 2m ² /Ltr* Walls: 10m ² /Ltr*
Touch Dry	4-6 Hours**
Recoatable	Overnight drying
Finishes	Soft Sheen
Sizes	2.5L, 5L, 20L

Perfect for use on

✓ Roofs

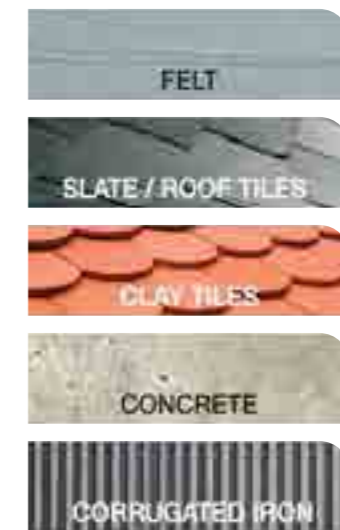

✓ Walls

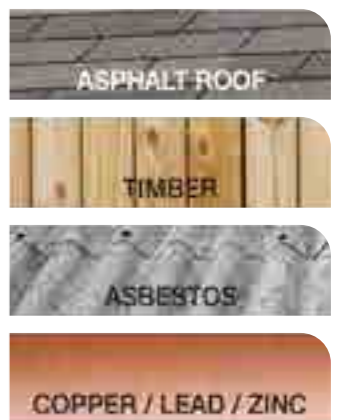

Available Colours

[See BEDEC Colour Card](#)

Also available in reflective white and reflective aluminium

* Depending on surface texture and method of application

** At a temperature of 18°C and relative humidity of 65%

NOTE: On porous surfaces we recommend a first coat diluted by 30% with clean water

NOTE: Not suitable for applying to surfaces that have no run-off, or where water ponding may occur





Acrylic Floor Paint

Acrylic Floor Paint has been specially formulated using a combination of high build modified self cross linking acrylic resins, affording the complete solution for commercial and domestic floor coating needs.

Suitable for use on wood and concrete floors.

Contains a micro aggregate to give slip resistant properties¹.



Why choose this paint?

 WATER BASED	 INTERIOR	 SELF PRIMING SELF UNDERCOATING	 SLIP RESISTANT ¹
 ALKALI RESISTANT	 QUICK DRYING	 MINIMAL DISRUPTION	 MINIMAL ODOUR
 MICROPOROUS BREATHABLE	 HELPS DUST/OIL REMOVAL	 EXCELLENT DURABILITY	 EASY TO CLEAN UP WITH WATER

Perfect for use on interior

- ✓ Cement Floors²
- ✓ Wooden Floor Boards
- ✓ MDF
- ✓ OSB/Sterling Boards
- ✓ Chipboard

Properties

Application	Brush, Roller, Spray
Coverage	10-13m ² /Ltr*
Touch Dry	<2 Hours
Recoatable	4 Hours
Reusable Floor	Light Foot Traffic: 6 Hours** Heavy Foot Traffic: 16-24 Hours**
Finishes	Satin
Sizes	1l, 2.5l, 5l, 20l

Available Colours

[See BEDEC Colour Card](#)

Other colours available to order

* Depending on surface texture, porosity, and method of application
 ** Hot/Wet car tyre pickup can be avoided by the use of protection pads under the tyres
NOTE: On porous surfaces we recommend a first coat diluted by 30% with clean water

¹ The clear floor paint is not slip resistant
² Power floated concrete floors should be etched or abraded



Multi Surface Varnish

A water based varnish manufactured on an acrylic resin, reinforced with Polyurethane.

Designed for application to most substrates including wood, non-ferrous metals, and most types of plastic.

We do not recommend using Multi Surface Varnish on external wood unless it has been previously painted.



Why choose this paint?

 WATER BASED	 INTERIOR & EXTERIOR ¹	 MULTI SURFACE	 USE OVER OLD PAINT
 GOOD SCRUB RESISTANCE	 QUICK DRYING	 MINIMAL ODOUR	 HEAT RESISTANT (UP TO 80C)
 POLYURETHANE TOUGHENED	 MICROPOROUS BREATHABLE	 FLEXIBLE	 EASY TO CLEAN UP WITH WATER

Perfect for use on

- ✓ Wood¹
- ✓ Aluminium
- ✓ Lead
- ✓ Galvanized Steel/Zinc
- ✓ Copper
- ✓ Plastics
- ✓ MDF
- ✓ Chipboard
- ✓ Plastic
- ✓ Bricks
- ✓ Stone
- ✓ Terracotta

¹ Not recommended to use on external wood unless it has been previously painted

Properties

Application	Brush, Roller, Spray
Coverage	15-20m ² /Ltr*
Touch Dry	<2 Hours**
Recoatable	4 Hours**
Finishes	Gloss, Satin, Matt
Sizes	500ml, 1L, 2.5L

Available Colours

Clear

* Depending on surface texture and method of application
 ** At a temperature of 18°C and relative humidity of 65%
NOTE: On porous surfaces we recommend a first coat diluted by 30% with clean water



Aqua Advanced Primer Undercoat

A high-performance acrylic primer undercoat specially formulated using 100% acrylic polymer resin which has a proven performance record for durability, adhesion and water resistance.

Designed for use with water and solvent based enamels, this product is an ideal undercoat for the Aqua Advanced range.



Acrylic Primer Undercoat

Acrylic Primer Undercoat is a cost-effective primer for interior and exterior application.

It will adhere to most substrates and provide a suitable base for acrylic water-based paints and alkyd enamels.



Why choose this paint?

WATER BASED	INTERIOR & EXTERIOR	MULTI SURFACE	GOOD FLOW
HIGH BUILD	ALKALI RESISTANT	QUICK DRYING	PROMOTES ADHESION
MICROPOROUS BREATHABLE	HIGH QUALITY	EASY TO CLEAN UP WITH WATER	

Premium quality undercoat for

- ✓ Wood¹
- ✓ Metal²
- ✓ MDF
- ✓ Chipboard
- ✓ Previously painted surfaces
- ✓ Trim - such as Windows, Skirting, Doors, Joinery, Fascia and Soffits

¹ For woods liable to staining we suggest priming with BEDEC ALL PRIME or BEDEC STAIN BLOCK
² Anti-corrosive primer such as BEDEC ALL PRIME or BEDEC METAL PRIMER is needed for bare ferrous metals

Properties

Application	Brush, Roller, Spray
Coverage	13-15m ² /Ltr*
Touch Dry	<2 Hours**
Recoatable	4 Hours**
Finishes	Matt
Sizes	1L, 2.5l, 5l

Available Colours



* Depending on surface texture and method of application
 ** At a temperature of 18°C and relative humidity of 65%
NOTE: On porous surfaces we recommend a first coat diluted by 30% with clean water
NOTE: Smooth surfaces should be lightly abraded to provide a key

Why choose this paint?

WATER BASED	INTERIOR & EXTERIOR	MULTI SURFACE	ALKALI RESISTANT
QUICK DRYING	PROMOTES ADHESION	MICROPOROUS BREATHABLE	EASY TO CLEAN UP WITH WATER

Cost effective undercoat for


- ✓ Wood¹
- ✓ Metal²
- ✓ MDF
- ✓ Chipboard
- ✓ Previously painted surfaces
- ✓ Trim - such as Windows, Skirting, Doors, Joinery, Fascia and Soffits

¹ For woods liable to staining we suggest priming with BEDEC ALL PRIME or BEDEC STAIN BLOCK
² Anti-corrosive primer such as BEDEC ALL PRIME or BEDEC METAL PRIMER is needed for bare ferrous metals

Properties

Application	Brush, Roller, Spray
Coverage	12-15m ² /Ltr*
Touch Dry	<2 Hours**
Recoatable	4 Hours**
Finishes	Matt
Sizes	2.5l, 5l

Available Colours



* Depending on surface texture and method of application
 ** At a temperature of 18°C and relative humidity of 65%
NOTE: On porous surfaces we recommend a first coat diluted by 30% with clean water
NOTE: Smooth surfaces should be lightly abraded to provide a key



Stain Block

Stain Block is a unique product incorporating traditional and new technology to produce a water-based product that will hold back most normal stains helping to prevent bleed through that can cause unsightly stains on new paintwork.



Why choose this paint?

WATER BASED	INTERIOR & EXTERIOR	MULTI SURFACE	STAIN BLOCKING
WOOD PRIMING	WOOD KNOTS, SAP, TANNIN STAINS	EASY TO APPLY	ALKALI RESISTANT
QUICK DRYING	MINIMAL ODOUR	FLEXIBLE	EASY TO CLEAN UP WITH WATER

Perfect for use on

- ✓ Water Stains
- ✓ Nicotine
- ✓ Marker Pen
- ✓ Crayon
- ✓ Tea
- ✓ Coffee
- ✓ Tannin Bleeds
- ✓ Smoke Fire Damage
- ✓ Tar/Bitumen
- ✓ Soft & Hard Woods
- ✓ Wood Knots, Sap, and Tannin Stains

Properties

Application	Brush, Roller, Spray
Coverage	12-14m ² /Ltr*
Touch Dry	<2 Hours**
Recoatable	4 Hours**
Finishes	Satin Translucent
Sizes	250ml, 750ml, 2.5l, 5l, 20l

Available Colours



* Depending on surface texture and method of application
 ** At a temperature of 18°C and relative humidity of 65%
 NOTE: On porous surfaces we recommend a first coat diluted by 30% with clean water
 NOTE: We recommend the application of at least two coats. More coats may be required depending on the severity and type of stain



Metal Primer

Metal Primer is a specifically formulated water-based anti-corrosive metal primer that can be used on almost any metal surface inside and out.

This water based product is quick drying and easy to apply.



Why choose this paint?

WATER BASED	INTERIOR & EXTERIOR	METAL PRIMING	RUST INHIBITING
EASY TO APPLY	ALKALI RESISTANT	QUICK DRYING	PROMOTES ADHESION
MINIMAL ODOUR	EASY TO CLEAN UP WITH WATER		

Perfect for use on

- ✓ Iron/Steel
- ✓ Aluminium
- ✓ Galvanized Steel/ Zinc
- ✓ Lead
- ✓ Copper
- ✓ Brass

Properties

Application	Brush, Roller, Spray
Coverage	9-13m ² /Ltr*
Touch Dry	<2 Hours**
Recoatable	4 Hours**
Finishes	Satin
Sizes	250ml, 750ml, 2.5l, 5l, 20l

Available Colours



* Depending on surface texture and method of application
 ** At a temperature of 18°C and relative humidity of 65%
 NOTE: Smooth surfaces should be lightly abraded to provide a key

Location Selector

The perfect guide to help you choose the correct paint for the job.



Finishing Coats



Living Room and Hallway

Walls, Ceilings and Coving	✓		✓	✓	✓				✓
Trim (Doors, Skirting Board, Window Sills, Window Frames)	✓		✓						✓
Furniture (Wood ¹ , Metal ²)	✓		✓						✓
Flooring (Wood ¹ , Unglazed Tiles and Concrete)								✓	

Kitchen

Walls, Ceilings and Coving	✓		✓	✓	✓				✓
Trim (Doors, Skirting Board, Window Sills, Window Frames)	✓		✓						✓
Cupboards	✓		✓						✓
Flooring (Wood ¹ , Unglazed Tiles and Concrete)								✓	
Ceramic Wall Tiles ⁴	✓								

Bathroom

Walls, Ceilings and Coving	✓		✓	✓	✓				✓
Trim (Doors, Skirting Board, Window Sills, Window Frames)	✓		✓						✓
Ceramic Wall Tiles ⁴	✓								✓
Furniture (Wood ¹ , Metal ²)	✓		✓						✓

Bedroom

Walls, Ceilings and Coving	✓		✓	✓	✓				✓
Trim (Doors, Skirting Board, Window Sills, Window Frames)	✓		✓						✓
Furniture (Wood ¹ , Metal ²)	✓		✓						✓

Outside

Brickwork, Masonry and Concrete	✓	✓	✓				✓	✓	✓
Outbuildings (Wood, Metal/Plastic Cladding)	✓	✓	✓				✓	✓	
Fences (Wood ¹ , Metal ² , Plastic)	✓	✓	✓						
Trim, Fascia, Soft-fit, Guttering, Barge-board, Window Frames, Doors	✓	✓	✓						
External Equipment ² , Furniture and Ornaments	✓	✓							



BEDEC Primers



Surfaces

Wood	✓	✓		✓	✓
Plaster	✓	✓		✓	✓
Concrete	✓			✓	✓
Ferrous Metals	✓		✓		
Non-Ferrous Metals	✓	✓	✓	✓	✓
Stains	✓	✓			
Inhibits Rust	✓		✓		



Silicone Profilers

Bedec Silicone Profilers are designed to be used with flexible sealants and caulks.

Create a clean profile for sealing operations in Bathrooms, Kitchens, Floors, Doors and Windows. Simply choose the size that is suitable for the project and clean afterwards with a suitable cleaning fluid.

Box contains 3 tools of different size:

- ✓ 5mm
- ✓ 8mm
- ✓ 10mm



1. For woods liable to staining we suggest priming with BEDEC ALL PRIME or BEDEC STAIN BLOCK
2. Anti-corrosive primer such as BEDEC ALL PRIME or BEDEC METAL PRIMER is needed for bare ferrous metals
3. Not on Fletton bricks, stocks, or Engineering Bricks
4. Not recommended for use in shower cubicals or areas under constant water contact



Frequently Asked Questions



Barn Paint

Are BEDEC products water based and low VOC?

Yes, all of our products are water based and low or minimal VOC* content and conform to current regulations. (*Volatile Organic Compounds).

Are our products breathable?

Yes, all our products are microporous and breathable.

Are other colours available in our products?

Most of our products can be ordered in any colour (excluding metallics and fluorescents).

Can I paint a shower cubicle with any of your products?

No unfortunately not, we do not recommend any of our products to be used in areas under constant water contact such as shower cubicles and baths.

Can our products be applied on decking?

No, we do not recommend painting our products on decking.

What is the difference between MSP and Barn Paint?

MSP is an interior and exterior product, it is formulated to have high film build and good flow. Barn paint is an exterior product designed to flex with external surfaces. Both products can be used on similar exterior surfaces.

Can I paint glass?

MSP and ALL PRIME can be painted on the internal facing side of glass.

What temperature does it need to be to paint outside?

It needs to be above 8 degrees Celsius before painting outside. The temperature of the environment and surface you are painting on to needs to stay above this level until the paint has had time to dry. Cold and humid/damp environments will adversely affect drying times.

Can I paint in the rain?

No.

Can I paint over Mordant solution?

No. We do not recommend painting any of our products over Mordant solution.

Are samples available?

Yes, we offer free of charge samples for most of our products.



MSP

Why do we recommend a diluted first coat on porous substrates?

If the surface is porous, a diluted (30% clean water) first coat allows the paint to penetrate the substrate and act as a binder/sealer to allow further coats to sit on top, which will protect and provide a much longer life span. A stabilizer solution is not required with BEDEC surface coatings.



MSP

Can you paint over Extra-Flex and Interior-Flex?

Yes, you can paint over these products, but it may mean that the hairline cracks will re-appear. It is best to use the same product when overcoating.

Are our products safe to use on areas with animals?

All of our products are completely water based and safe to use on animal areas such as stables, bee hives, dog kennels etc.

Our products are safe to be painted on children's furniture.

Can I paint a fire place?

Our rule of thumb is, if it's too hot to touch then it's too hot to paint. Remember to apply the paint when the object/surface you are painting is at room temperature. Our paints are not designed to be applied on substrates that go above 80° Celsius.



MSP

The colour I have received looks different to the colour card or website?

Our product guides are only a guide on colour as they are dependent on the printing. Screen colours can vary from each computer so if you would like to see a true colour before purchasing a tin, please request a sample or a dry colour pattern. Paint in its wet form is always a different colour from the dry form.

I have purchased two tins from different batch numbers to use on the same task and they are slightly different?

Like wallpaper, different batches of paint will have a slight variation in colour. To avoid this ensure you order enough paint to finish the project.

If you have already purchased two batches of paint you can blend the two batches together.

Can your products be used on lime?

We do not recommend using any of our products where lime is present.

Can I paint over damp patches?

Any structural issues causing damp need to be fixed before application of paint. The paint is breathable but it will not solve a damp problem.

Do I need to prime galvanized steel?

MSP and Barn Paint can go straight on to external galvanized steel if it has been weathered for 2 months, if it hasn't or is interior then it will need to be degreased with warm soapy water and methylated spirits.

Can I paint on Corrugated Asbestos roofing?

Yes you can. Super-flex is the best option. We suggest you clean down the surface and apply a anti-fungicidal wash if required and thin the first coat with 30% water.

I have opened the tin and it's the wrong colour?

The paint needs to be thoroughly stirred before checking the colour and using.



MSP



Product Guide

Product	Description	Interior	Exterior	Self Priming / Self Undercoating		Finishes	Spread	Sizes	Colours	VOC Level
				Interior	Exterior					
Multi Surface Paint (MSP)	Paint for any surface. Flexible and durable. Takes the thinking out of painting	✓	✓	✓		Matt, Satin, Gloss	12-14 m ² /L	250ml, 750ml, 2.5l, 5l, 20l	See BEDEC colour card	Low
Barn Paint	Durable, Long Lasting, Flexible and Non Cracking, Outside Paint		✓	✓		Matt, Satin, Gloss	13-15 m ² /L	2.5l, 5l, 20l	See BEDEC colour card	Low
Aqua Advanced	High Quality Trim Paint	✓	✓			Matt, Satin, Egg Shell, Gloss	13-15 m ² /L	1l, 2.5l, 5l	See BEDEC colour card	Low
Aqua Advanced Primer Undercoat	A High Performance Acrylic Primer Undercoat. 100% Acrylic Resin	✓	✓	n/a		Matt	13-15 m ² /L	1l, 2.5l, 5l	See BEDEC colour card	Low
SDL	Wall and Ceiling Paint, Anti-Reflective <2%, Low Matt	✓		✓		Matt (<2%)	10m ² /L	5l	White	Minimal
All Prime	Primer, Bond Coat Sealer, Grip Primer, Stain Blocker, Metal Primer, Rust Inhibitor	✓	✓	n/a		Matt	10m ² /L	750ml, 2.5l, 5l	White Dark Grey	Minimal
Interior Flex	A paint that does not crack on internal walls	✓		✓		Low Sheen	9-11 m ² /L	2.5l, 5l	Brilliant White Magnolia	Minimal
Extra Flex	Masonry paint, a paint that does not crack on external walls		✓	✓		Smooth Satin	9-11 m ² /L	5l	See BEDEC colour card	Low
Super Flex	Flexible roof coating, waterproof, can also be used on walls		✓	✓		Soft Sheen	Roof: 2m ² /L Wall: 10m ² /L	2.5l, 5l, 20l	See BEDEC colour card	Low
Acrylic Floor Paint	The complete solution for commercial and domestic floor coating needs	✓		✓		Satin	10-13m ² /L	1l, 2.5l, 5l	See BEDEC colour card	Low
Multi Surface Varnish (MSV)	Tough polyurethane, acrylic varnish	✓	✓	✓		Matt, Satin, Gloss	15-20 m ² /L	500ml, 2.5l, 1l	Clear	Minimal
Acrylic Primer	Cost effective acrylic primer	✓	✓	✓		Matt	12-15 m ² /L	2.5l, 5l	Dark Grey	Low
Stain Block	Stain blocking agent (Nicotine, water stains, marker pen, crayon, tea and coffee, smoke, and more...)	✓	✓	n/a		Satin	12-14 m ² /L	250ml, 750ml, 2.5l, 5l, 20l	Translucent Grey	Minimal
Metal Primer	Rust Inhibiting Primer	✓	✓	n/a		Satin	9-13m ² /L	250ml, 750ml, 2.5l, 5l, 20l	Red Oxide Phosphate Grey	Low

Simply a Better Paint

