


# 5900

## WATER BASED EPOXY SYSTEM

Low odour and quick drying

- Very low solvent content
- Virtually odourless during application
- Quick drying and quickly recoatable
- Can be applied directly to slightly damp surfaces
- Good chemical and wear resistance
- Easy 1:1 mixing ratio

**No production stop required!**

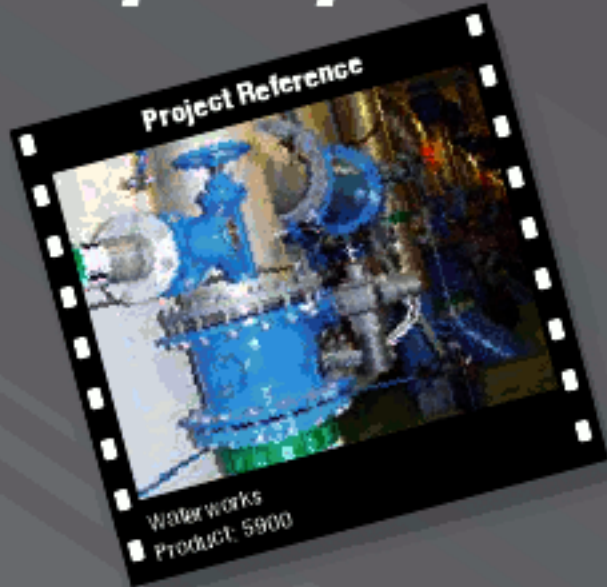


With the 5900 coating, production can continue whilst painting thanks to its low VOC content and quick drying properties.



### Technical reference

	Water based
Coverage:	Primer: 6.8 m <sup>2</sup> /l. at 50 µm dry Topcoat: 6.5 m <sup>2</sup> /l. at 50 µm dry
Dry to touch:	4 hrs
Dry to recoat:	6 hrs
Colours:	Primer: grey, Topcoat: see colour card
Pack sizes:	5L
Substrates:	Barc/galvanised steel, concrete floors & walls, masonry, mineral fibre board.
Recoat with:	9200 RUST-O-THANE®

### Standard colours:

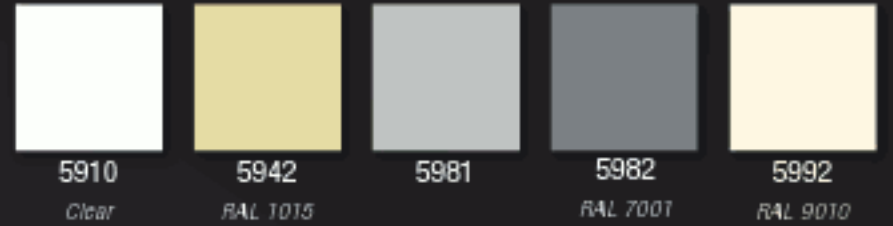

Available in almost any colour  
Note: Minor differences between a above printed and supplied colours is possible.

