

Floor, Sport
and
Line Marking
Paints

COO-VAR®


PAINTS, PRIMERS AND SPECIALISED COATINGS

Profloor Plus Floor Paint

Profloor Plus is a premium heavy duty, low viscosity and solvent free epoxy two-pack floor paint with outstanding resistance to abrasion.

Ideal for use in factories, workshops/garages, stadiums and other high traffic places.

- Exceptionally durable, Low odour and Easy to Clean
- Takes heavy traffic after 36 hours
 - Interior & Exterior
- Available in 10 standard colours

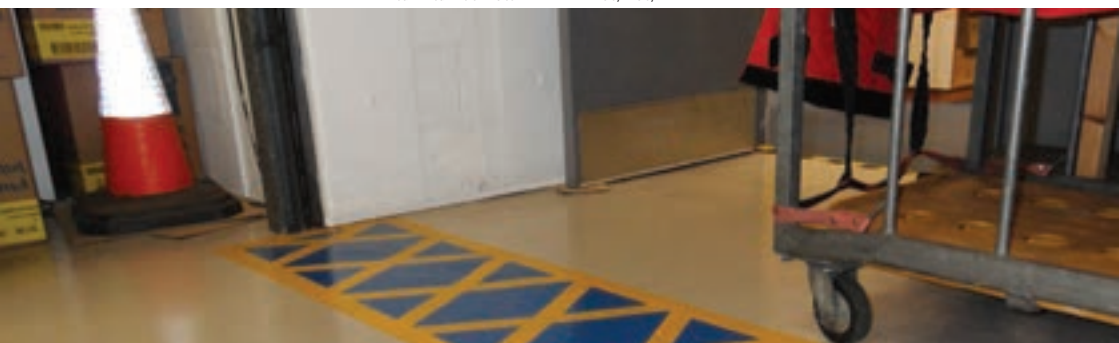

Technical Information

Tin Size:	5kg mixed unit
Suitable Surfaces:	Wood, Concrete, Masonry, Asphalt
Coverage:	4-5 sqm. Per kg
Drying time:	Touch Dry: 4-8 hrs Hard Dry: 24-36hrs
Finish:	Hard Film Gloss, Anti-slip <small>if aggregated</small>
Application:	Brush or shortpile roller



COVERING OUR CUSTOMERS' NEEDS SINCE 1908

Ellenshaw Works, Lockwood Street, Hull, HU2 0HN

T: +44 (0)1482 328053 F: +44 (0) 1482 219266 E: info@coo-var.co.uk

www.coo-var.co.uk



COO-VAR[®]

PAINTS, PRIMERS AND SPECIALISED COATINGS

Profloor Plus CC (Cold Cure)

Profloor Plus CC gives all the properties of Coo-Var Profloor Plus, with the added benefit of being able to use it in cold conditions- no more waiting until the weather is perfect. This epoxy two-pack solvent free coating is designed to cure when the surface temperature is in the range of 0-10°C.



Profloor Plus FH (Fast Hardening)

If you need a fast-curing floor paint then the FH version of Profloor Plus may be for you. This epoxy two-pack coating has been designed to allow the laying and recoating of the surface within the same working day- saving you time and money, and is particularly valuable when rapid return to service is required. This paint achieves its best performance when the surface temperature is 15-20°C.



COVERING OUR CUSTOMERS' NEEDS SINCE 1908

Ellenshaw Works, Lockwood Street, Hull, HU2 0HN

T: +44 (0)1482 328053 F: +44 (0) 1482 219266 E: info@coo-var.co.uk

www.coo-var.co.uk

