








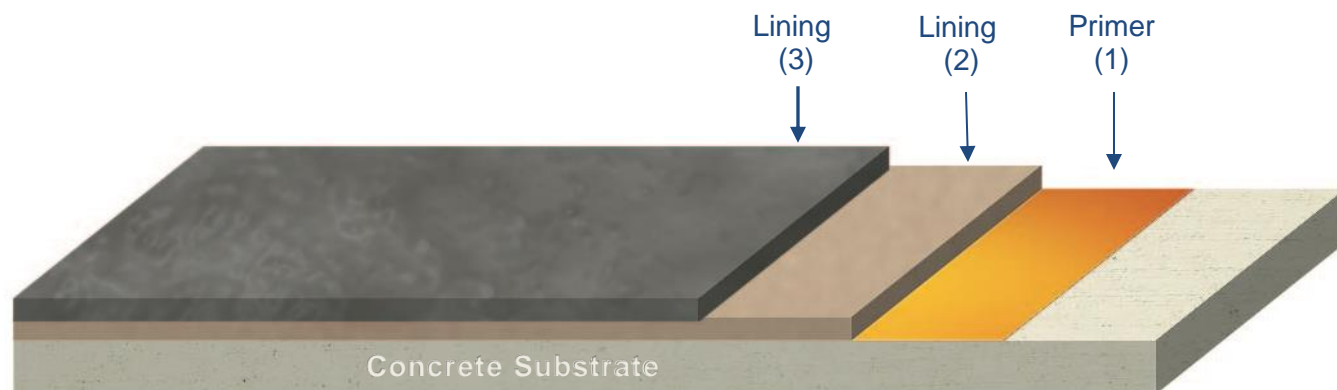


Ceilmote® 232 Flakeline

- Flake filled novolac vinyl ester lining
- Excellent chemical resistance to a wide range of aggressive chemicals



Typical total system thickness: 1000µm (40mil)

Layer		Typical Thickness*		Component	Coverage Rate**		Application Methods
					Metric	Imperial	
1	Primer	Seal concrete		Ceilmote 380 Resin	5 m ² /litre	200 sq.ft./gal.	  
2	Lining	500µm	20mil	Ceilmote 232 Flakeline	1.5 m ² /litre	60 sq.ft./gal.	  
3	Lining	500µm	20mil	Ceilmote 232 Flakeline	1.5 m ² /litre	60 sq.ft./gal.	  

Full System details including Application Guidelines and MSDS for component products can be found at:
<https://www.international-pc.com/product/ceilmote-232-flakeline>

Notes

This document is for guidance only. For further information please contact your AkzoNobel Protective Coatings Representative.

*All thicknesses given are typical and may change dependent on service conditions.

** All coverage rates are practical, for guidance only and may vary due to a number of factors.